

ABB BALDOR RELIANCE III

Customer information packet

KL1200

.17HP, 1725RPM, 1PH, 60HZ, 56C, 3408L, OPEN, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	.170 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.900 A @ 230.0 V 2.300 A @ 208.0 V 3.800 A @ 115.0 V
Design Code	N
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	49.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Drip Cover Mounting
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.9 a

Part Detail

Revision	AF
Type	AC
Mech. spec.	34F011
Base	
Status	PRD/A
Elec. spec.	34WGW020
Layout	34LYF011
Eff. date	12-31-2024
CD Diagram	CD0001
Poles	04
Leads	6#18
Proprietary	False
Created date	01-01-0001

Insulation Class	B
Inverter Code	Not Inverter
KVA Code	M
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3408L
Mounting Arrangement	F1
Number of Poles	4
Overall Length	11.22 IN
Power Factor	57
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.35
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	KL1200								
SPEC.	34F11W20								
HP	.17								
VOLTS	115/230								
AMP	3.8/1.9								
RPM	1725								
FRAME	56C		HZ	60			PH	1	
SER.F.	1.35	CODE	M	DES	N		CLASS	B	
NEMA-NOM-EFF	49	PF	57						
RATING	40C AMB-CONT								
CC									
DE	6203		ODE	6203					
ENCL	OPEN	SN							
	SFA 4.4/2.2								

Parts List

Part number	Description	Quantity
SA009973	SA 34F11W20	1.000 ea
RA006418	RA 34F11W20	1.000 ea
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 ea
34CB3002A	CB CAST W/.88 DIA HOLE	1.000 ea
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 ea
SP1006A01	INSULATOR MODEL 35 SWITCH	1.000 ea
34EP3210A03SP	FR ENDPLATE, MACH	1.000 ea
34CB4800SP	CAPACITOR COVER, STAMPED PRIMED	1.000 ea
51XB1016A05	10-16X5/16HX WA SL SR TYB (F/S)	2.000 ea
HW5100A03	WAVY WASHER (W1543-017)	1.000 ea
34EP3401A01SP	PU ENDPLATE, MACH	1.000 ea
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 ea
34AD2000	BAFFLE PLATE, STAMPED	1.000 ea
60XW0632A06	6-32 X 3/8 TORX HEAD SCREW TAPTITE II	4.000 ea
34FH4000A11	DRIP COVER, STAMPED,PRIMER	1.000 ea
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 ea
34CB4517	CB LID 4 MTG HOLES .22 DIA STAMPED, FOR	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 ea
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 ea
MG1050G01	CELEROL MEDIUM CHARCOAL METALLIC GRAY	0.014 ga
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
SP5051B16	MDL 34 TORQ STAT SW,TYPE L , STD F1 & F2	1.000 ea
EC1130A02SP	ELEC CAP, 130-156 MFD, 125V, 1.48D X 3.3	1.000 ea
HA3100A12	THRUBOLT 10-32 X 7.375	4.000 ea
LC0001A01	CONN LABEL / WARNING LABEL (LC0001 / LB1	1.000 ea
NP1256L	ALUM UL CC INDUSTRIAL MOTOR A60	1.000 ea
34PA1002	PKG GRP, PRINT PK1001A01	1.000 ea
PK3083	STYROFOAM PACKING CRADLE	1.000 ea

PK3088

MICROFOAM, 8"X"8 PERF. SHEETS

1.000 ea

AC Induction Motor Performance Data

Record # 6851

Typical performance - not guaranteed values

Winding: 34WGW020-R001			Type: 3408L		Enclosure: TEFC	
Nameplate Data				230 V, 60 Hz: High Voltage Connection		
Rated Output (HP)		.17		Full Load Torque		0.5 LB-FT
Volts		115/230		Start Configuration		direct on line
Full Load Amps		3.8/1.9		Breakdown Torque		1.38 LB-FT
R.P.M.		1725		Pull-up Torque		1.2 LB-FT
Hz	60	Phase	1	Locked-rotor Torque		2.13 LB-FT
NEMA Design Code		N	KVA Code	Starting Current		7.8 A
Service Factor (S.F.)		1.35		No-load Current		1.75 A
NEMA Nom. Eff.		49	Power Factor	57	Line-line Res. @ 25°C	
						13.7 Ω A Ph 10.8 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		50°C
S.F. Amps		4.4/2.2		Temp. Rise @ S.F. Load		61°C

Load Characteristics 230 V, 60 Hz, 0.17 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	32	41	49	57	63	69	67
Efficiency	21	35	45	49	52	53	53
Speed	1775	1760	1730	1710	1685	1650	1665
Line amperes	1.75	1.8	1.9	2	2.1	2.4	2.2


ABB Motors and Mechanical Inc.

WINDING # 34WG020

Typical performance - not guaranteed values.

0.17 HP 1 PH 60 HZ 1725 RPM 230 V 3408L

TORQUES (LB-FT): PO=1.38 PU=1.2 LR=2.13 LRA=7.8

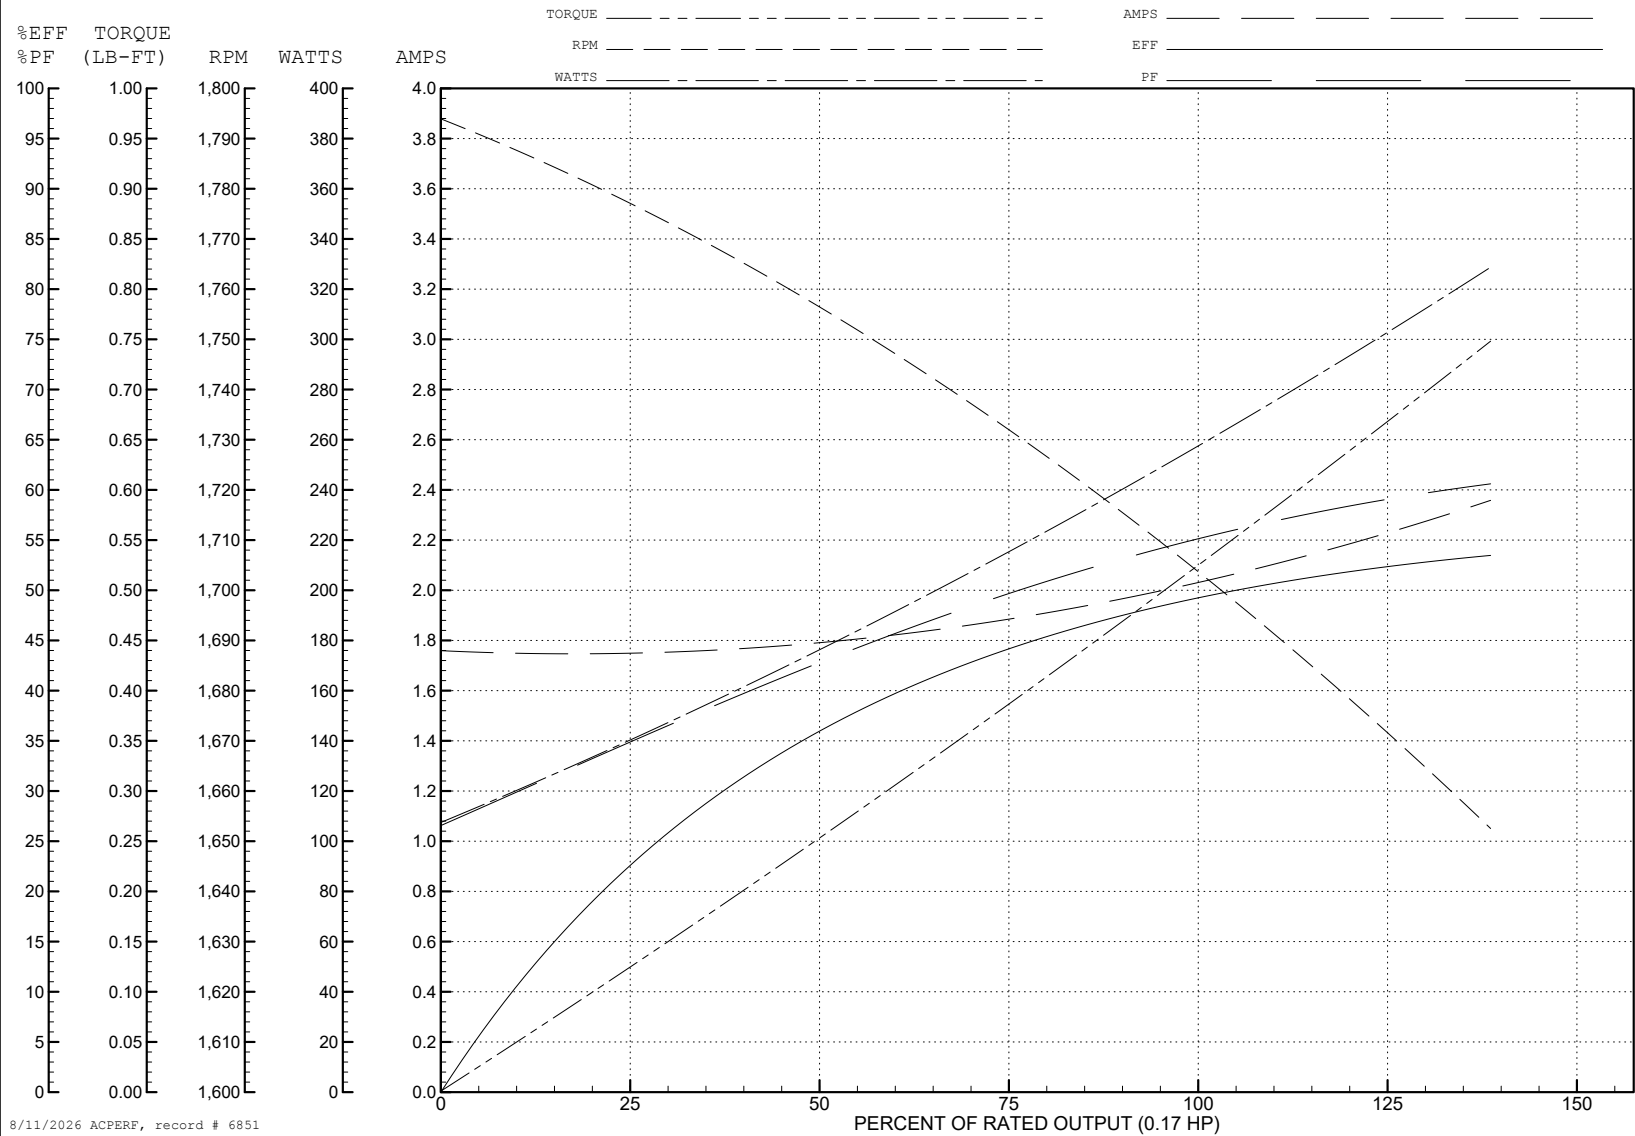

AC Induction Motor Performance Data

Record # 69691

Typical performance - not guaranteed values

Winding: 34WGW020-R001			Type: 348L		Enclosure: TEFC		
Nameplate Data			115 V, 60 Hz: Low Voltage Connection				
Rated Output (HP)		.17	Full Load Torque		0.5 LB-FT		
Volts		115/230	Start Configuration		direct on line		
Full Load Amps		3.8/1.9	Breakdown Torque		1.38 LB-FT		
R.P.M.		1725	Pull-up Torque		1.2 LB-FT		
Hz	60 Phase	1	Locked-rotor Torque		2.35 LB-FT		
NEMA Design Code		N	KVA Code		M	Starting Current	16.2 A
Service Factor (S.F.)		1.35	No-load Current		3.5 A		
NEMA Nom. Eff.		49	Power Factor		57	Line-line Res. @ 25°C	3.23 Ω A Ph 10.5 Ω B Ph
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		50°C		
S.F. Amps		4.4/2.2	Temp. Rise @ S.F. Load		58°C		
			Locked-rotor Power Factor		95		
			Rotor inertia		0.019 LB-FT2		

Load Characteristics 115 V, 60 Hz, 0.17 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	37	43	47	54	60	60	60
Efficiency	21	34.9	44.9	49	51.9	52.9	52.3
Speed	1775	1760	1730	1710	1685	1650	1671
Line amperes	3.5	3.6	3.8	4	4.2	4.8	4.44


ABB Motors and Mechanical Inc.

WINDING # 34WG020


Typical performance - not guaranteed values.

0.17 HP 1 PH 60 HZ 1725 RPM 115 V 348L

TORQUES (LB-FT): PO=1.38 PU=1.2 LR=2.35 LRA=16.2

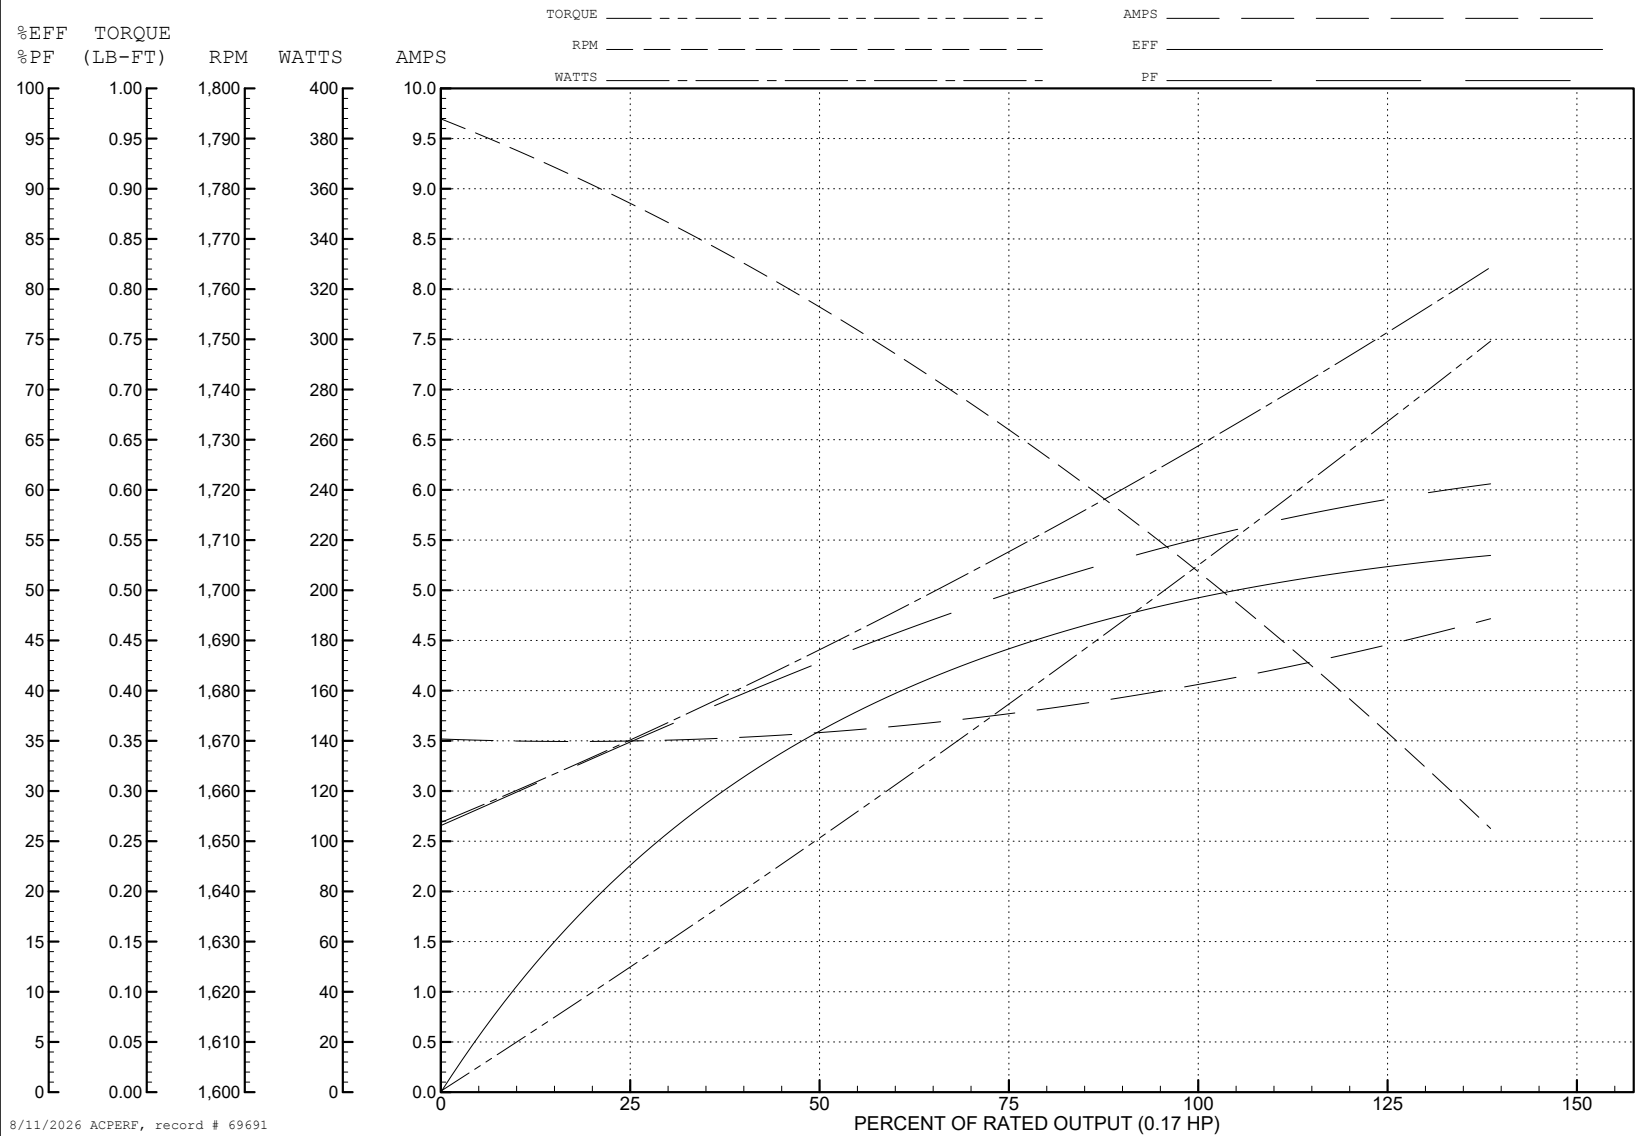

8/11/2026 ACPERF, record # 69691

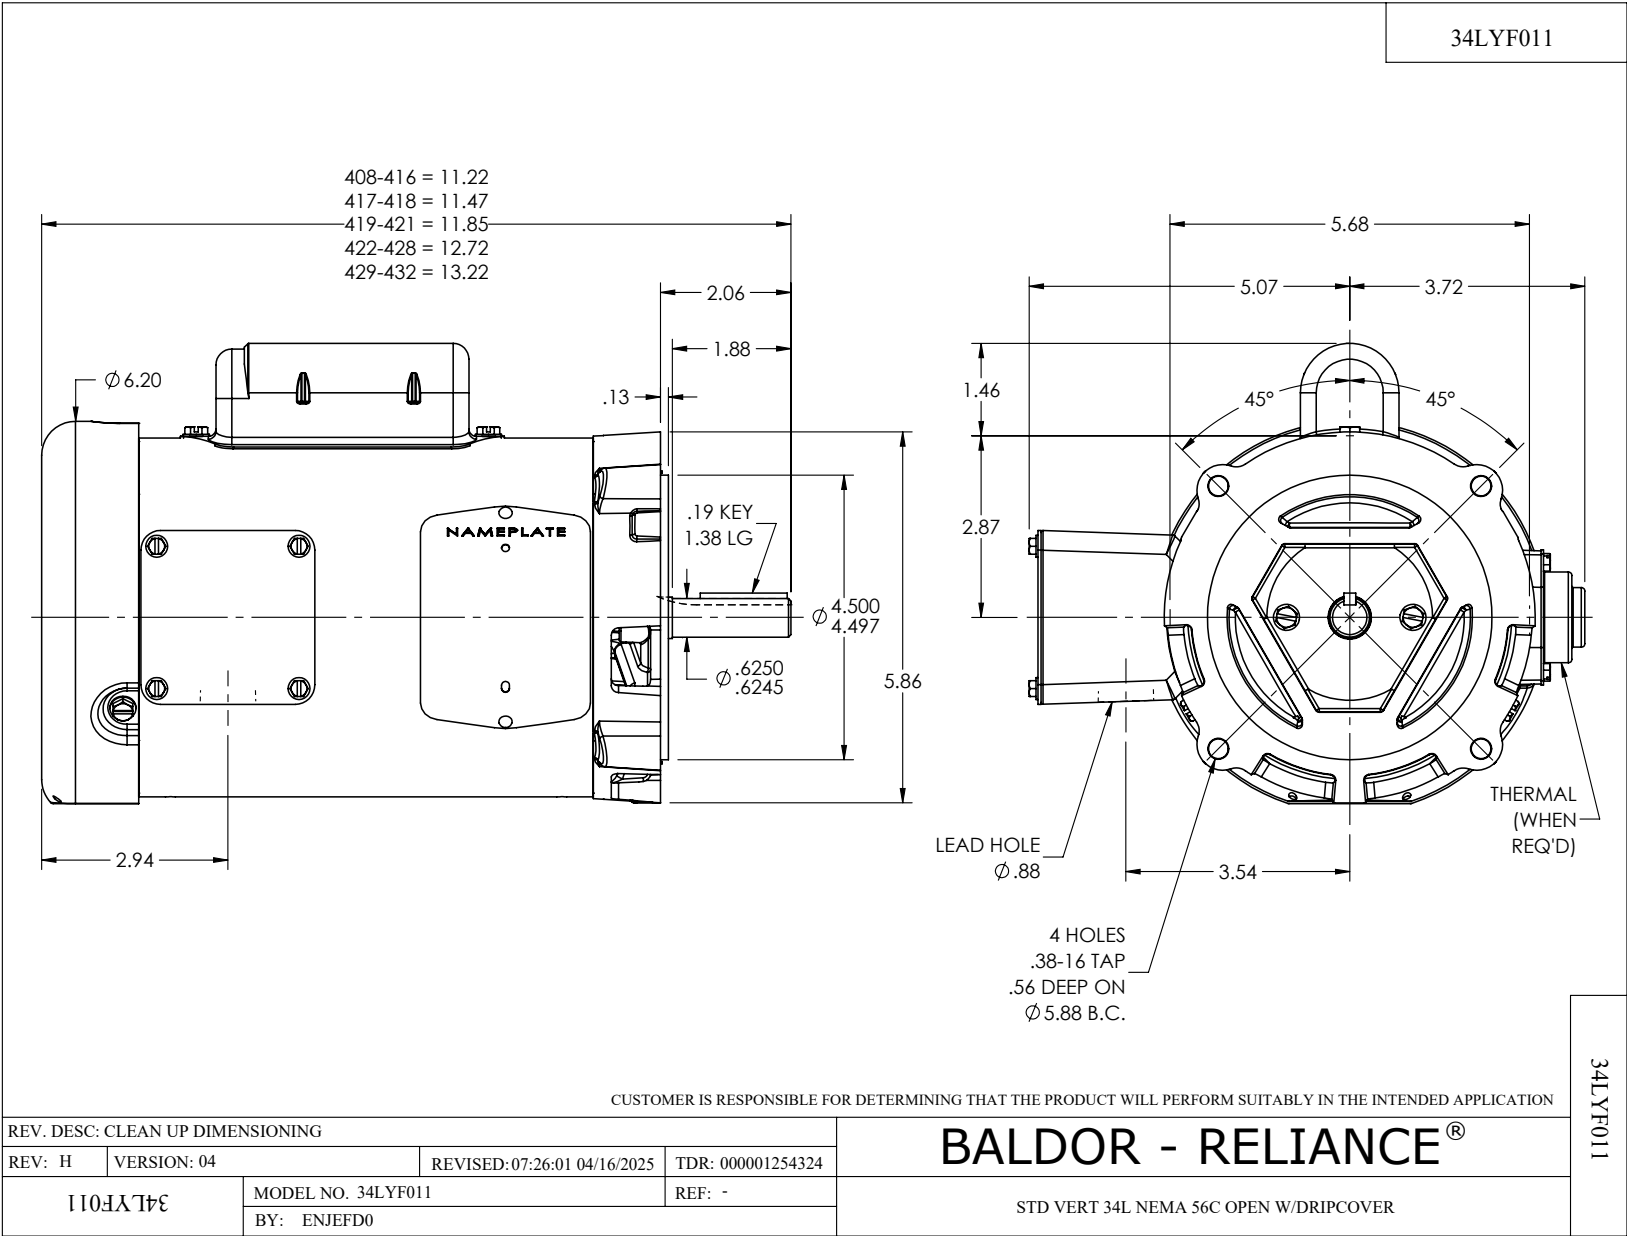

CD0001

