

ABB BALDOR RELIANCE III

Customer information packet

KL3403

.25HP, 1725RPM, 1PH, 60HZ, 56C, 3411L, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	.250 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	2.500 A @ 230.0 V 3.000 A @ 208.0 V 5.000 A @ 115.0 V
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	55.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	2.5 a

Part Detail

Revision	AM
Type	AC
Mech. spec.	34C063
Base	
Status	PRD/A
Elec. spec.	34WG5506
Layout	34LYC063
Eff. date	12-30-2024
CD Diagram	CD0001
Poles	04
Leads	6#18
Proprietary	False
Created date	01-01-0001

Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3411L
Mounting Arrangement	F1
Number of Poles	4
Overall Length	11.35 IN
Power Factor	57
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.35
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L											
CAT.NO.	KL3403										
SPEC.	34C63-5506										
HP	.25										
VOLTS	115/230										
AMP	5/2.5										
RPM	1725										
FRAME	56C		HZ	60			PH	1			
SER.F.	1.35	CODE	L	DES	N		CLASS	B			
NEMA-NOM-EFF	55	PF	57								
RATING	40C AMB-CONT										
CC											
DE	6203		ODE	6203							
ENCL	TEFC	SN									
	SFA 5.6/2.8										

Parts List

Part number	Description	Quantity
SA005681	SA 34C63-5506	1.000 ea
RA002427	RA 34C63-5506	1.000 ea
EC1161A02	BMI 091A161B125AD2A ELEC CAP 115V 1.4 X	1.000 ea
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 ea
34CB3002A	CB CAST W/.88 DIA HOLE	1.000 ea
34GS1029A01	GASKET, CONDUIT BOX	1.000 ea
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
34EP3102A01SP	FR ENDPLATE, MACH	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 ea
34CB4800SP	CAPACITOR COVER, STAMPED PRIMED	1.000 ea
34GS3000SP	GASKET, CAPACITOR BOX	1.000 ea
51XB1016A05	10-16X5/16HX WA SL SR TYB (F/S)	2.000 ea
HW5100A03	WAVY WASHER (W1543-017)	1.000 ea
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 ea
34FN3002A01SP	EXTERNAL FAN, PLASTIC, .637/.639 HUB W/	1.000 ea
34FH4002A01SP	IEC FH NO GREASER PRIMED	1.000 ea
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 ea
34CB4517	CB LID 4 MTG HOLES .22 DIA STAMPED, FOR	1.000 ea
34GS1031A01	GASKET, FLAT CONDUIT BOX LID (LEXIDE)	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 ea
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 ea
34EP3300A24SP	PU ENDPLATE, MACH	1.000 ea
MG1050G01	CELEROL MEDIUM CHARCOAL METALLIC GRAY	0.014 ga
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
SP5051B16	MDL 34 TORQ STAT SW,TYPE L , STD F1 & F2	1.000 ea
HA3100A12	THRUBOLT 10-32 X 7.375	4.000 ea
LC0001A01	CONN LABEL / WARNING LABEL (LC0001 / LB1	1.000 ea
NP1256L	ALUM UL CC INDUSTRIAL MOTOR A60	1.000 ea
34PA1002	PKG GRP, PRINT PK1001A01	1.000 ea

PK3083	STYROFOAM PACKING CRADLE	1.000 ea
PK3088	MICROFOAM, 8"X"8 PERF. SHEETS	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea

AC Induction Motor Performance Data

Record # 6772

Typical performance - not guaranteed values

Winding: 34WG5506-R001			Type: 3411L	Enclosure: TEFC			
Nameplate Data			230 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		.25	Full Load Torque		0.75 LB-FT		
Volts		115/230	Start Configuration		direct on line		
Full Load Amps		5/2.5	Breakdown Torque		2.13 LB-FT		
R.P.M.		1725	Pull-up Torque		1.88 LB-FT		
Hz	60	Phase	1	Locked-rotor Torque		2.48 LB-FT	
NEMA Design Code		N	KVA Code	L	Starting Current		9.95 A
Service Factor (S.F.)		1.35		No-load Current		2.2 A	
NEMA Nom. Eff.		55	Power Factor	57	Line-line Res. @ 25°C		8.88 Ω A Ph 7.06 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		57°C	
S.F. Amps		5.6/2.8		Temp. Rise @ S.F. Load		70°C	

Load Characteristics 230 V, 60 Hz, 0.25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	32	40	49	57	63	69	67
Efficiency	28	40	50	55	58	59	59
Speed	1779	1763	1740	1720	1700	1670	1680
Line amperes	2.2	2.3	2.4	2.5	2.7	2.9	2.8


ABB Motors and Mechanical Inc.

WINDING # 34WG5506



Typical performance - not guaranteed values.

0.25 HP 1 PH 60 HZ 1725 RPM 230 V 3411L

TORQUES (LB-FT) : PO=2.13 PU=1.88 LR=2.48 LRA=9.95

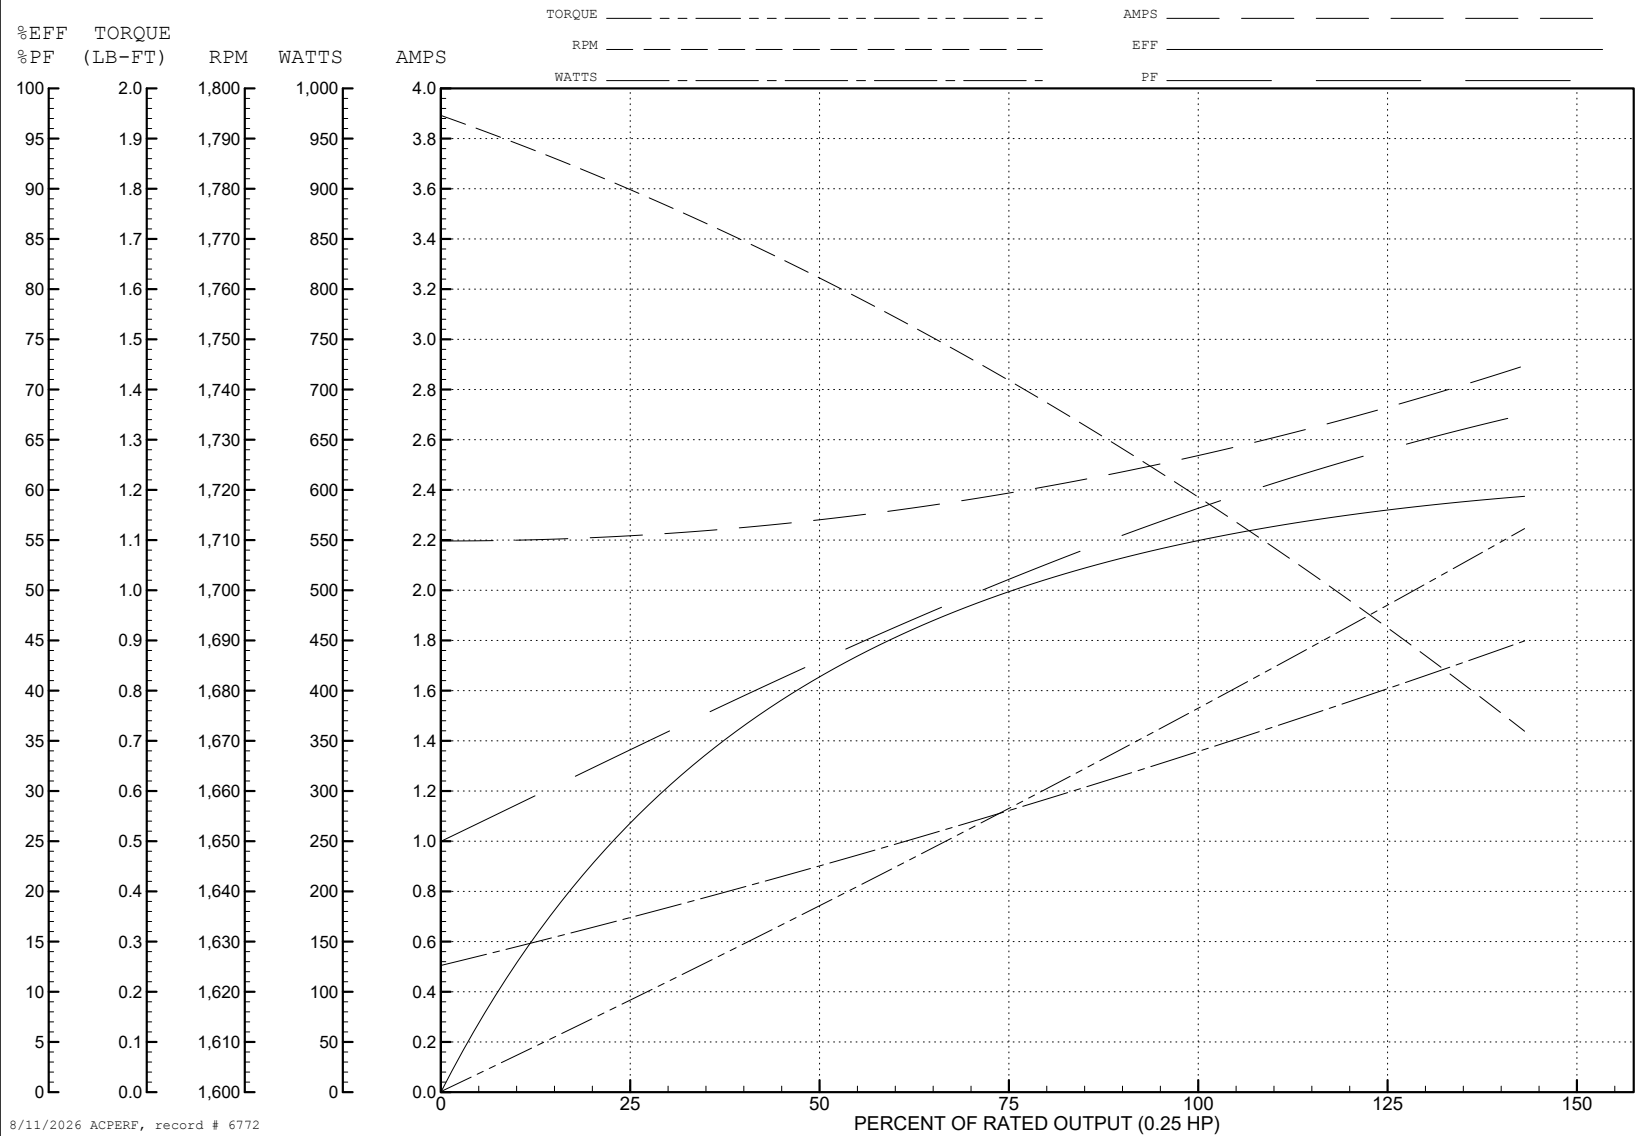

34LYC063

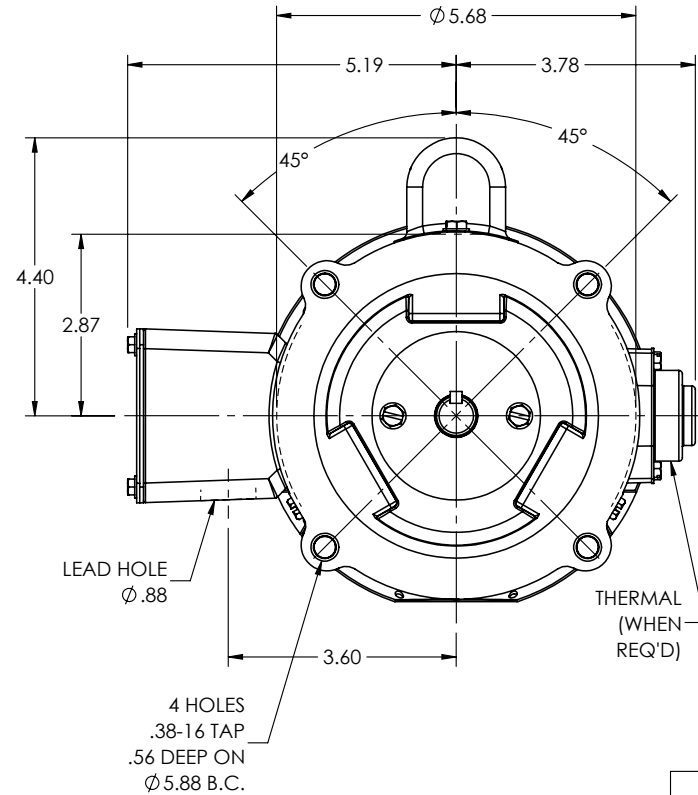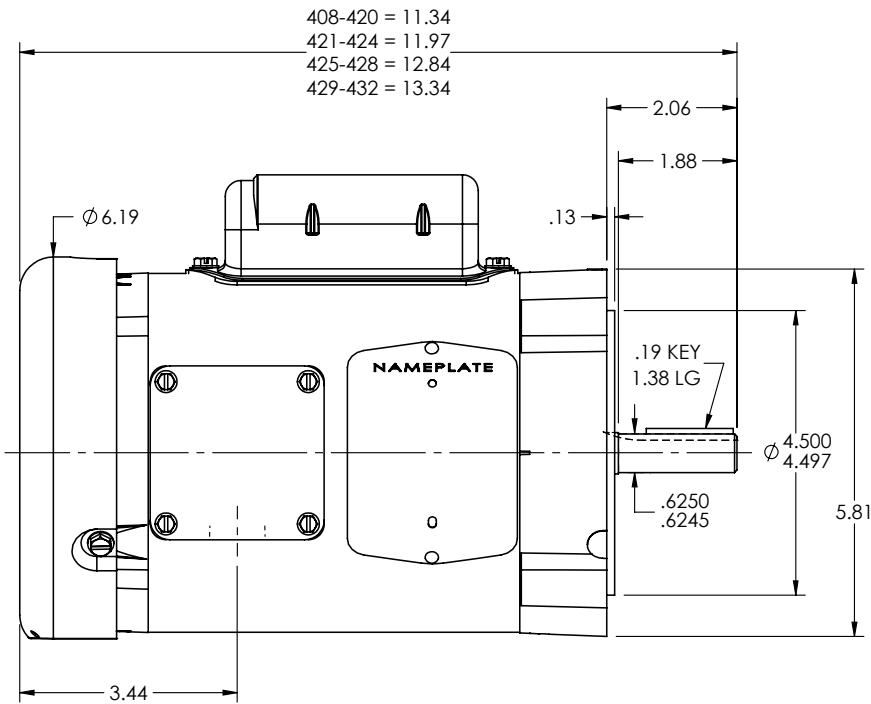

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: CLEAN UP DIMENSIONING

REV: P

VERSION: 07

REVISED: 02:08:16 04/14/2025

TDR: 000001253803

34LYC063

MODEL NO. 34LYC063

BY: ENJEFD0

REF: -

BALDOR - RELIANCE®

STD VERT 34L NEMA 56C TEFC

34LYC063

CD0001

