ABB BALDOR RELIANCE

Customer information packet

L1318T

1HP, 1750RPM, 1PH, 60HZ, 143T, 3528L, OPEN, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/1/2026 7:46:19 AM

Specifications

Enclosure	OPEN
Frame	143T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	1.000 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ
	230.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	12.500 A @ 115.0 V
	6.300 A @ 230.0 V
Design Code	L
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	74.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	6.3 a
Insulation Class	F
Inverter Code	Not Inverter

Part Detail

Revision	C
Type	AC
Mech. spec.	35DD001
Base	
Status	PRD/A
Elec. spec.	35WGG376
Layout	35LYDD001
Eff. date	06-28-2024
CD Diagram	CD0001
Poles	04
Leads	6#18 Y
Proprietary	False
Created date	09-21-2022

KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3528L
Mounting Arrangement	F1
Number of Poles	4
Overall Length	12.13 IN
Power Factor	69
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1750 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	L1318T								
SPEC.	35DD001G376								
HP	1								
VOLTS	115/230								
AMP	12.5/6.3								
RPM	1750								
FRAME	143T	**HZ**	60			**PH**	1		
SER.F.	1.15	**CODE**	L	**DES**	L	**CLASS**	F		
NEMA-NOM-EFF	74	**PF**	69						
RATING	40C AMB-CONT								
CC									
DE	6205	**ODE**	6203						
ENCL	OPEN	**SN**							
	SFA 13.9/6.95								

Parts List

Part number	Description	Quantity
SA414844	SA 35DD001G376	1.000 ea
RA406613	RA 35DD001G376	1.000 ea
EC1645B06	ELEC CAP 165V 2.0 X 4.3	1.000 ea
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 ea
35CB3009	35 CB W/1.09 DIA. LEAD HOLE @ 6:	1.000 ea
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
35EP3209A00	MASTER ODE,203 BRG,GRSR	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 ea
35CB4802A02SP	CAPACITOR COVER, STAMPED X	1.000 ea
51XB1016A05	10-16X5/16HX WA SL SR TYB (F/S)	2.000 ea
HW5100A03	WAVY WASHER (W1543-017)	1.000 ea
35EP3210A00	MASTER DE,205 BRG,1.000SH,GRSR	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 ea
35CB4521	35 LIPPED CB LID (GALV & PHOSPH)	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 ea
HA7000A01	KEY RETAINER 7/8" DIA SHAFT	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
WD1000A15	3-520132-2 AMP FLAG (4M/RL NON-CANC/NON-	2.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
MG1050G01	CELEROL MEDIUM CHARCOAL METALLIC GRAY	0.017 ga
SP5051A24	MODEL 35 TORQ STATIONARY SWITCH FOR "L"	1.000 ea
HA3100A18	THRUBOLT 10-32 X 9.250	4.000 ea
LC0001A01	CONN LABEL / WARNING LABEL (LC0001 / LB1	1.000 ea
NP1256L	ALUM UL CC INDUSTRIAL MOTOR A60	1.000 ea
35PA1066	PKG GRP, PRINT PK1008A07	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
FE-0000001	ZRTG FE ASSEMBLY	1.000 ea

PE-0000001	ZRTG PE ASSEMBLY	1.000 ea

Accessories

Part number	Description	Multiplier
35-8764	C FACE KIT	A8
35EP1604A01SP	D-FLANGE KIT	

AC Induction Motor Performance Data
Record # 89066
Typical performance - not guaranteed values

Winding: 35WGG376-R003	**Type:** 3528L	**Enclosure:** OPEN

Nameplate Data				**115 V, 60 Hz: Low Voltage Connection**	
Rated Output (HP)			1	**Full Load Torque**	3.01 LB-FT
Volts			115/230	**Start Configuration**	direct on line
Full Load Amps			12.5/6.3	**Breakdown Torque**	9.7 LB-FT
R.P.M.			1750	**Pull-up Torque**	7.8 LB-FT
Hz	60	**Phase**	1	**Locked-rotor Torque**	13.9 LB-FT
NEMA Design Code	L	**KVA Code**	L	**Starting Current**	85.3 A
Service Factor (S.F.)			1.15	**No-load Current**	9.53 A
NEMA Nom. Eff.	74	**Power Factor**	69	**Line-line Res. @ 25ºC**	0.525 Ω A Ph 1.17 Ω B Ph
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	35°C
S.F. Amps				**Temp. Rise @ S.F. Load**	58°C
				Locked-rotor Power Factor	94.8
				Rotor inertia	0.203 lb-ft²

Load Characteristics 115 V, 60 Hz, 1 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	33	48	60	69	76	80	80
Efficiency	53.5	67.3	72.9	74.9	74.6	72.8	67.2
Speed	1786	1775	1763	1750	1735	1714	1704
Line amperes	9.3	9.98	11.06	12.51	14.28	16.82	13.9


ABB Motors and Mechanical Inc.


WINDING # 35WGG376

1 HP 1 PH 60 HZ 1750 RPM 115 V 3528L


Typical performance - not guaranteed values.

TORQUES(LB-FT): PO=9.7 PU=7.8 LR=13.9 LRA=85.3

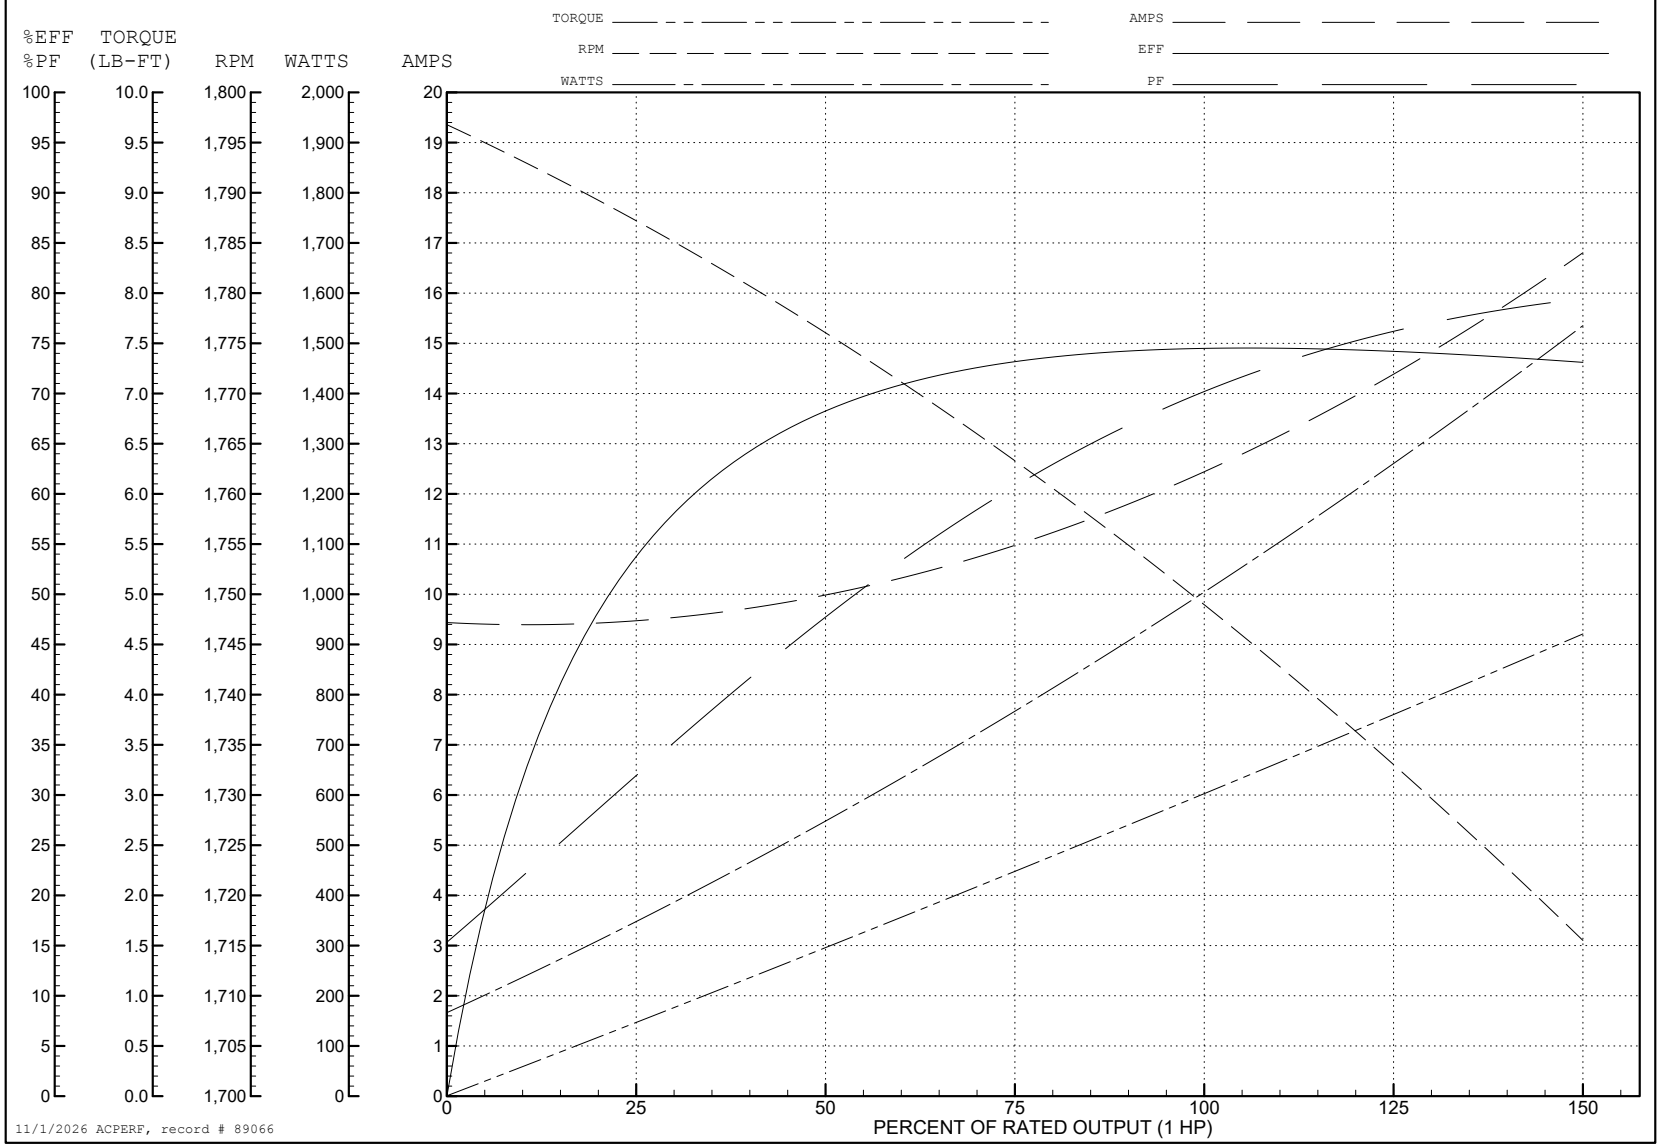

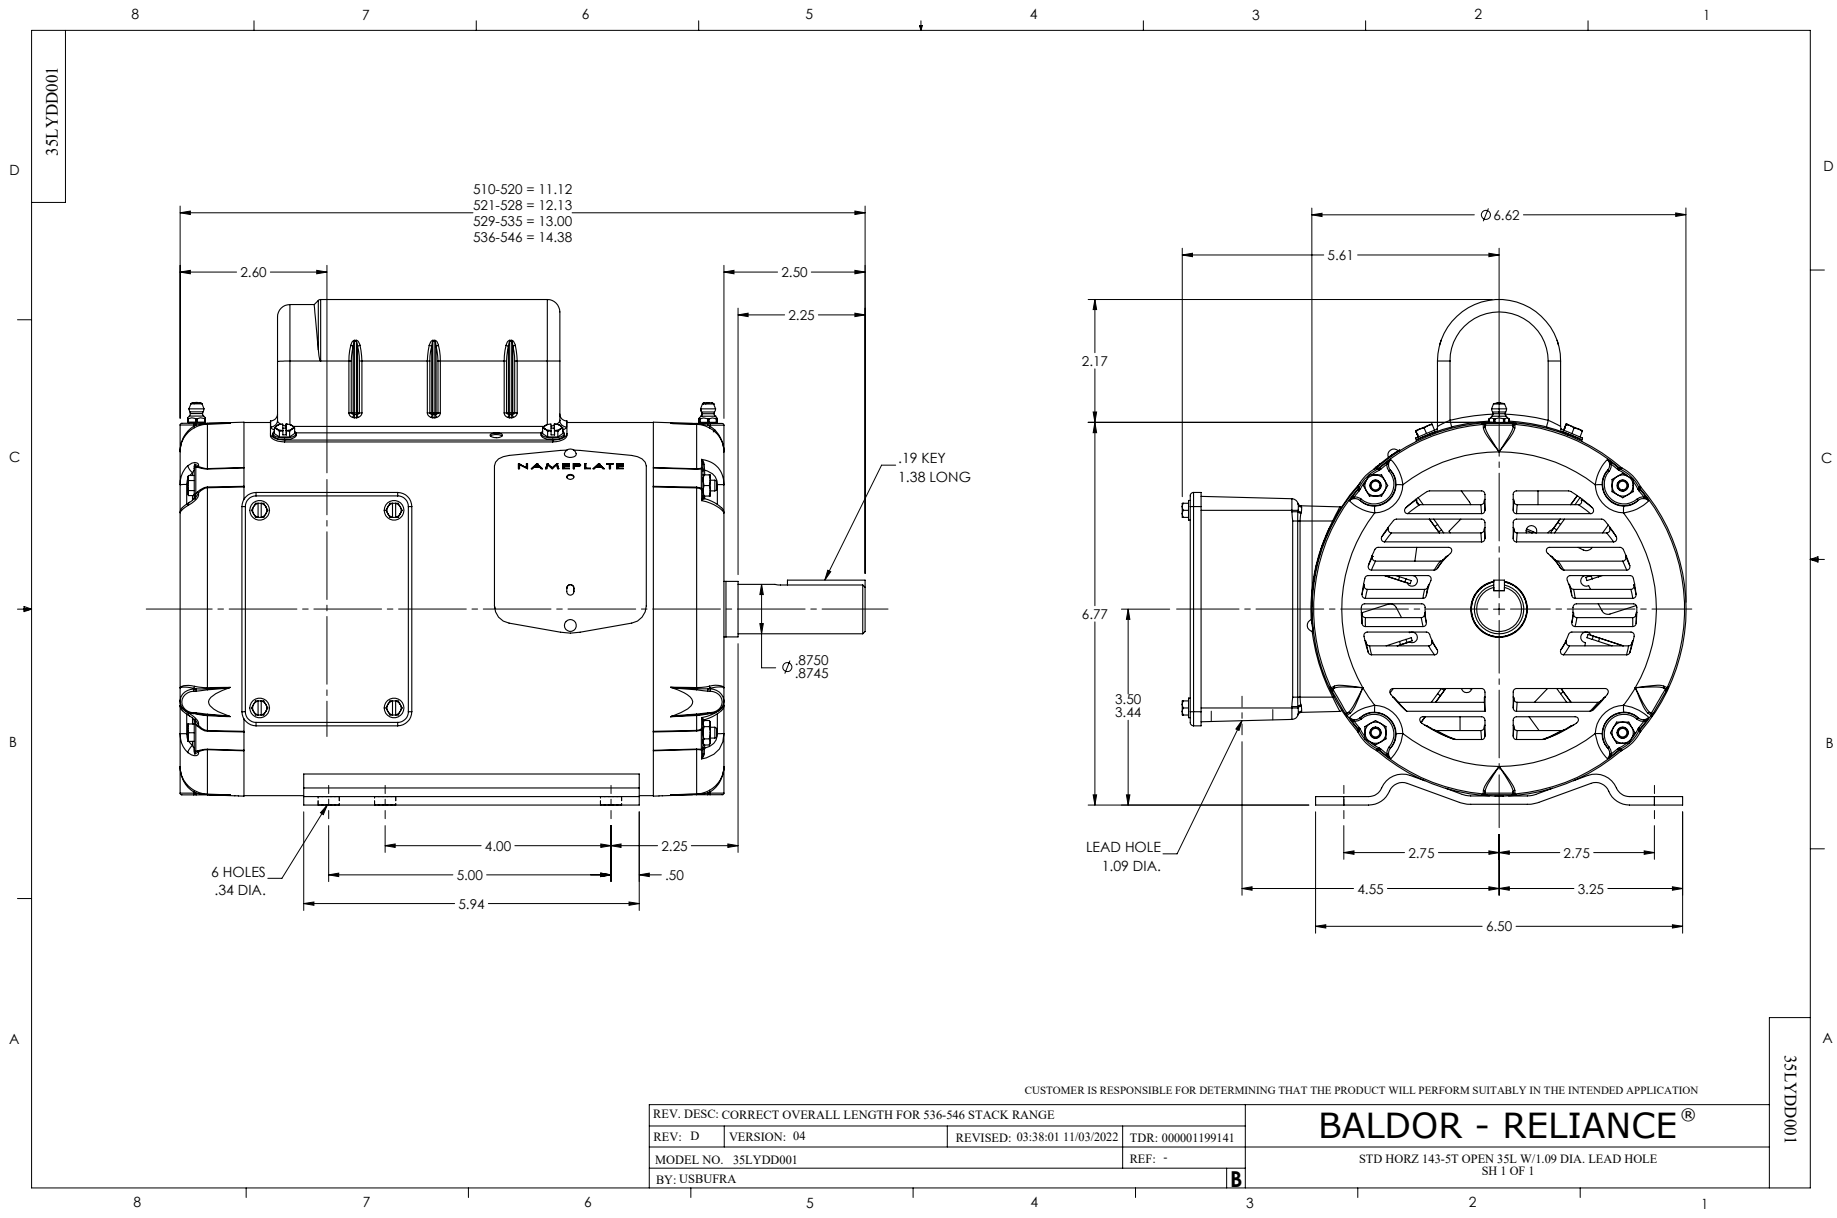
35LYDD001
510-520 = 11.12
521-528 = 12.13
529-535 = 13.00
536-546 = 14.38
2.60
2.50
2.25
NAMEPLATE
.19 KEY
1.38 LONG
Ø .8750
.8745
4.00
2.25
6 HOLES
.34 DIA.
5.00
.50
5.94
Ø 6.62
5.61
2.17
6.77
3.50
3.44
LEAD HOLE
1.09 DIA.
2.75
2.75
4.55
3.25
6.50
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: CORRECT OVERALL LENGTH FOR 536-546 STACK RANGE
REV: D
VERSION: 04
REVISED: 03:38:01 11/03/2022
TDR: 000001199141
MODEL NO. 35LYDD001
REF: -
BY: USBUFRA
B
BALDOR - RELIANCE®
STD HORZ 143-5T OPEN 35L W/1.09 DIA. LEAD HOLE
SH 1 OF 1
35LYDD001

CD0001

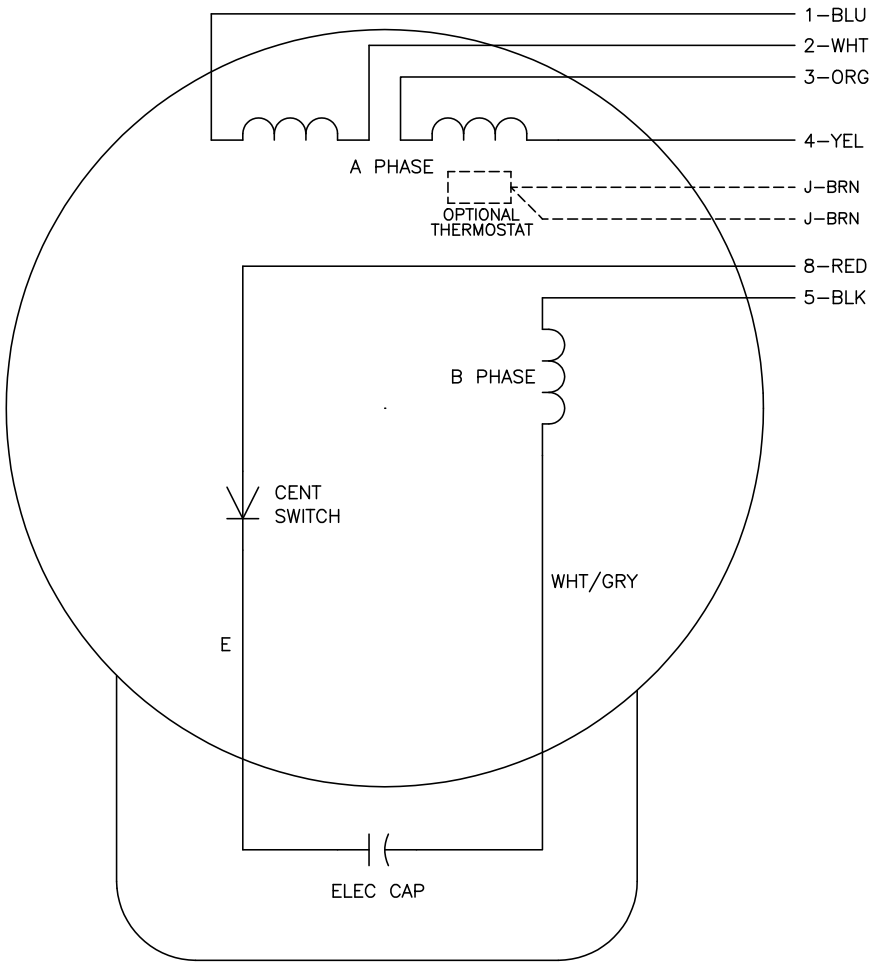

	LINE A	LINE B	JOIN
HIGH STD	1	4,5	2,3,8
HIGH OPP	1	4,8	2,3,5
LOW STD	1,3,8	2,4,5	–
LOW OPP	1,3,5	2,4,8	–

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: D	BY: JLP	REVISED: 04/08/99 1:16	TDR: 0178636
CD0001		FILE: AAA00007405	MDL: –
		MTL: –	TYPE L, DV, REV, 6 LEADS

CD0001