

ABB BALDOR RELIANCE III

Customer information packet

L3708T

5HP, 1750RPM, 1PH, 60HZ, 213T, 3726LC, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	213T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	5.000 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	20.500 A @ 230.0 V 22.000 A @ 208.0 V
Design Code	L
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	84.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	20.5 a
Insulation Class	F
Inverter Code	Not Inverter

Part Detail

Revision	M
Type	AC
Mech. spec.	37M326
Base	
Status	PRD/A
Elec. spec.	37WGT877
Layout	37LYM326
Eff. date	05-13-2024
CD Diagram	CD0086
Poles	04
Leads	2#12 A PH,2#14 B PH
Proprietary	False
Created date	02-11-2010

KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	2 @ 12 AWG, A PH
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3726LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	19.02 IN
Power Factor	93
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1750 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	L3708T								
SPEC.	37M326T877								
HP	5								
VOLTS	230								
AMP	20.5								
RPM	1750								
FRAME	213T		HZ	60			PH	1	
SER.F.	1.15	CODE	H	DES	L	CLASS	F		
NEMA-NOM-EFF	84	PF	93						
RATING	40C AMB-CONT								
CC									
DE	6307		ODE	6206					
ENCL	TEFC	SN							

Parts List

Part number	Description	Quantity
SA190936	SA 37M326T877	1.000 ea
RA178601	RA 37M326T877	1.000 ea
OC3060F10SP	CYL OIL CAP 60MFD/370V	1.000 ea
EC1216D06	ELEC CAP, 216-259MFD, 330V, 2.06D X 4.38	2.000 ea
37FN3002A01SP	EXFN, PLASTIC, 9.00 OD, 1.155 ID	1.000 ea
HW3200A01	3/8-16X3/4 EYEBOLT WELDED F/S	1.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
HW3001B01	BRASS CUP WASHER, FOR #10 SCREW	1.000 ea
37EP3101A01	FR ENDPLATE, FOR ROUTING PURPOSES	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
13XF0832A08	8-32 X.50 PAN HD,SLTD, TYPE F SCREW, ZIN	2.000 ea
37CB5001A21	ENCL, A01 BOX W/LID, GASKETS & 1.09 LEAD	1.000 ea
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 ea
37EP3100A01	PUEP ASSEMBLY - ROUTING PUPROSES	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
XY3118A12	5/16-18 HEX NUT DIRECTIONAL SERRATION	4.000 ea
51XB1214A20	12-14X1.25 HWSSLD SERTYB	1.000 ea
07FH4007A06	IEC FH W/GRS, NOT @6, 3 F/C HOL & NOT FO	1.000 ea
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 ea
HW2501F21	KEY, 5/16 SQ X 2.375	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
MG1050G01	CELEROL MEDIUM CHARCOAL METALLIC GRAY	0.028 ga
SP5172A03	37 TYPE L TORQ STAT SWITCH LEAD ASSEMBLY	1.000 ea
WD1000A15	3-520132-2 AMP FLAG (4M/RL NON-CANC/NON-	10.000 ea
HA3104A17	5/16-18X13.250 T-BLT/OHIO	4.000 ea
NS2605	INSULATOR FOR 37 FRAMESWITCH (MH1011A10)	1.000 ea
LC0086	CONNECTION LABEL	1.000 ea
NP1256L	ALUM UL CC INDUSTRIAL MOTOR A60	1.000 ea
G0PA1000	PKG GRP, PRINT PK1026A06	1.000 ea

MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea

Accessories

Part number	Description	Multiplier
37-3301	C FACE KIT	P1

AC Induction Motor Performance Data

Record # 37143

Typical performance - not guaranteed values

Winding: 37WGT877-R001			Type: 3726LC		Enclosure: TEFC	
Nameplate Data			230 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		5	Full Load Torque		15 LB-FT	
Volts		230	Start Configuration		direct on line	
Full Load Amps		20.5	Breakdown Torque		40.3 LB-FT	
R.P.M.		1750	Pull-up Torque		32 LB-FT	
Hz	60 Phase	1	Locked-rotor Torque		46.2 LB-FT	
NEMA Design Code		L	KVA Code		H	
Starting Current		137 A	No-load Current		6.82 A	
Service Factor (S.F.)		1.15	Line-line Res. @ 25°C		0.386 Ω A Ph 1.1 Ω B Ph	
NEMA Nom. Eff.		84	Power Factor		93	
Temp. Rise @ Rated Load		68°C		Temp. Rise @ S.F. Load		
Rating - Duty		40C AMB-CONT		79°C		
S.F. Amps						

Load Characteristics 230 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	73	86	91	93	93	94	93
Efficiency	67	81.1	84.3	84.8	84.1	80.7	84.4
Speed	1788	1776	1764	1749	1731	1711	1738
Line amperes	8.48	11.7	15.8	20.5	25.9	32.2	23.7


ABB Motors and Mechanical Inc.

WINDING # 37WGT877

Typical performance - not guaranteed values.

5 HP 1 PH 60 HZ 1750 RPM 230 V 3726LC


TORQUES (LB-FT): PO=40.3 PU=32 LR=46.2 LRA=137

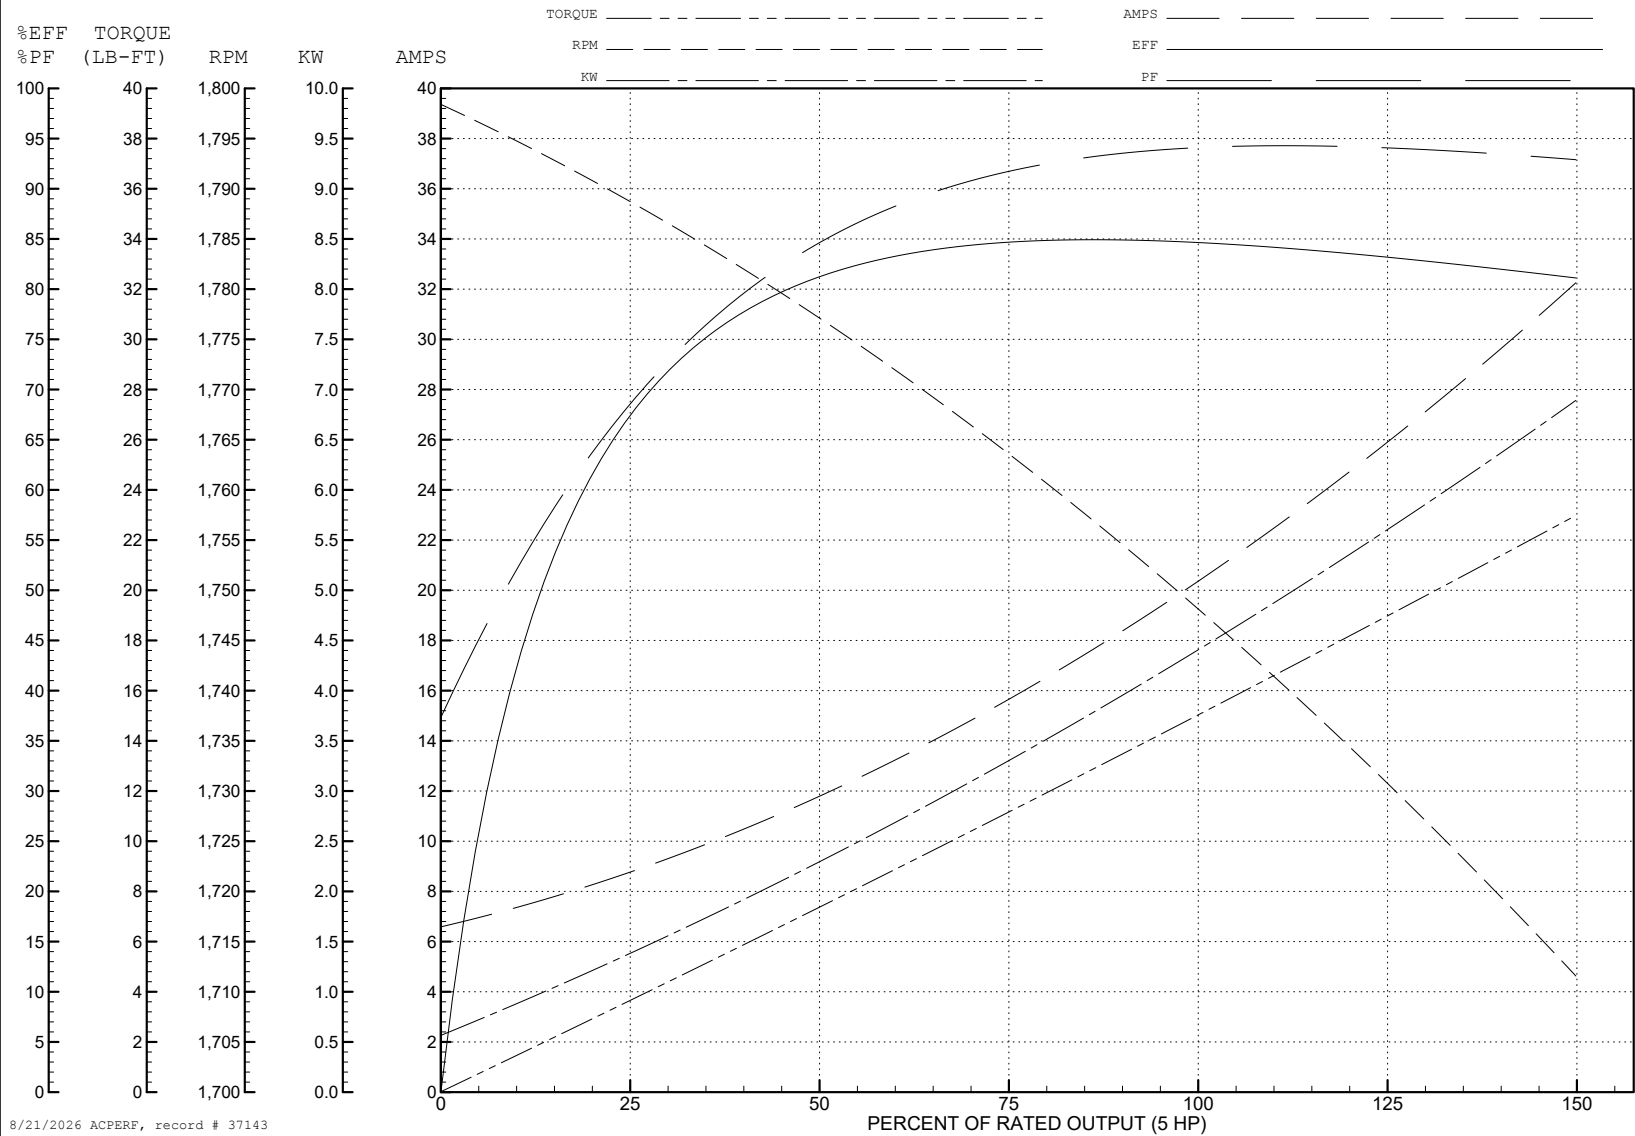

REV. DESC: LOAD TO SOLIDWORKS			
REV: A	VERSION: 01	REVISED: 04:57:21 08/25/2022	TDR: 00000119581
MODEL NO. 37LYM326			REF: -
BY: ENFRAJ0			

HORZ 213-5T TEFC 37LC 37CB3804, FINNED ENDRING, TORQ SWITCH

CD0086

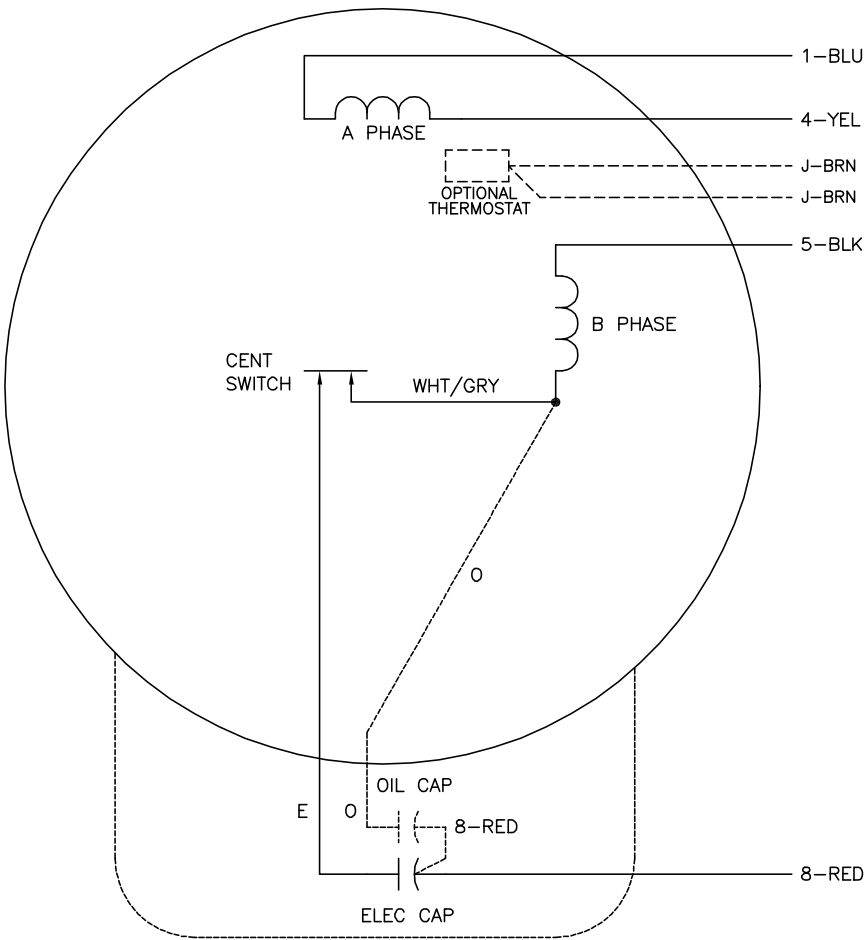

	LINE A	LINE B
STD	1,8	4,5
OPP	1,5	4,8

- NOTES:
1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
 2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
 3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
 4. OPTIONAL OIL CAPACITOR IS PROVIDED WHEN SPECIFIED.
 5. CAPACITORS MAY BE SEPERATELY MOUNTED.
 6. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: ADDED CK TO PLANT CODE			
REV. LTR: F	BY: JD	REVISED: 16:01:12 01/07/2002	TDR: 259409
980000		FILE: AAA00026904	REF: CD0086
		MTL: -	

BALDOR ELECTRIC Co.

TYPE L OR LC, SV, REV, 4 LEADS, CAPS MAY BE SEP MTD

CD0086