

ABB BALDOR RELIANCE III

Customer information packet

M3542-57

.75HP, 1425 IP44RPM, 3PH, 50HZ, 56, 3428M

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56
Frame Material	Steel
Frequency	50.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	230.0 V @ 50 HZ 400.0 V @ 50 HZ
Agency Approvals	C UR US CE CURUS UKCA WEEE
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.100 A @ 230.0 V 1.800 A @ 400.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	75.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part Detail

Revision	S
Type	AC
Mech. spec.	34A061
Base	
Status	PRD/A
Elec. spec.	34WG3996
Layout	34LYA061
Eff. date	09-25-2025
CD Diagram	CD0022
Poles	04
Leads	6#18
Proprietary	False
Created date	09-08-2011

Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.8 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3428M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	12.85 IN
Power Factor	59
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.25
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1425 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2717L									
CAT NO	M3542-57								
SPEC.	34A061-3996G1								
HP	.75/KW.56						PH	3	
VOLTS	230/400								
AMP	3.1/1.8								
R.P.M. (1/MIN)	1425								
FRAME	56		HZ		50		I.P.		44
SER.F.	1.25	CODE		L	DES		B	CL	F
NEMA-NOM-EFF	75.5							% (100%)	
PF	59								
RATING	40C AMB-S1 CONT				CC				
DE BRG	6203		ODE		6203				
ENCL	TEFC	SN							
BLANK	SFA 3.5/2								
	KG15 IC411								
	IE2 76.0(75%)69.9(50%)								

Parts List

Part number	Description	Quantity
SA230521	SA 34A061-3996G1	1.000 ea
RA217548	RA 34A061-3996G1	1.000 ea
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 ea
34CB3002A	CB CAST W/.88 DIA HOLE	1.000 ea
34GS1029A01	GASKET, CONDUIT BOX	1.000 ea
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
34EP3102A01SP	FR ENDPLATE, MACH	1.000 ea
HW5100A03	WAVY WASHER (W1543-017)	1.000 ea
34EP3102A02SP	FR/PU ENDPLATE, MACH	1.000 ea
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 ea
34FN3002A01SP	EXTERNAL FAN, PLASTIC, .637/.639 HUB W/	1.000 ea
34FH4002A01SP	IEC FH NO GREASER PRIMED	1.000 ea
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 ea
34CB4517	CB LID 4 MTG HOLES .22 DIA STAMPED, FOR	1.000 ea
34GS1031A01	GASKET, FLAT CONDUIT BOX LID (LEXIDE)	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 ea
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 ea
HW3001B02	BRASS CUP WASHER W/GROUND SYMBOL TAB,	1.000 ea
MG1050G01	CELEROL MEDIUM CHARCOAL METALLIC GRAY	0.014 ga
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
HA4067A01	PUSH IN DRAIN FITTING (BLACK)	1.000 ea
HA4067A01	PUSH IN DRAIN FITTING (BLACK)	1.000 ea
HA3100A45	THRUBOLT 10-32 X 8.875	4.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LC0034	CONNECTION LABEL	1.000 ea
NP2717L	ALUM NEMA IE2 UL CE CC	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
27PA1001	PKG GRP, PRINT PK1027A06	1.000 ea

AC Induction Motor Performance Data

Record # 35183

Typical performance - not guaranteed values

Winding: 34WG3996-R006			Type: 3428M		Enclosure: TEFC				
Nameplate Data			400 V, 50 Hz: High Voltage Connection						
Rated Output (HP)		.75	Full Load Torque		2.71 LB-FT				
Volts		230/400	Start Configuration		direct on line				
Full Load Amps		3.1/1.8	Breakdown Torque		13.3 LB-FT				
R.P.M.		1425	Pull-up Torque		8.9 LB-FT				
Hz	50 Phase	3	Locked-rotor Torque		9.78 LB-FT				
NEMA Design Code		B	KVA Code	L	Starting Current		10.5 A		
Service Factor (S.F.)		1.25	No-load Current		1.4 A				
NEMA Nom. Eff.		75.5	Power Factor		59	Line-line Res. @ 25°C		12.8 Ω	
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load				
S.F. Amps		3.5/2	Temp. Rise @ S.F. Load		Locked-rotor Power Factor				60
					Rotor inertia				0.0667 LB-FT2

Load Characteristics 400 V, 50 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	26	39	50	59	67	72	67
Efficiency	55.9	69.9	76	78.5	80.1	80.4	80.1
Speed	1487	1476	1465	1452	1439	1425	1439
Line amperes	1.42	1.49	1.6	1.74	1.9	2.1	1.9


ABB Motors and Mechanical Inc.

WINDING # 34WG3996



Typical performance - not guaranteed values.

0.75 HP 3 PH 50 HZ 1425 RPM 400 V 3428M

TORQUES (LB-FT): PO=13.3 PU=8.9 LR=9.78 LRA=10.5

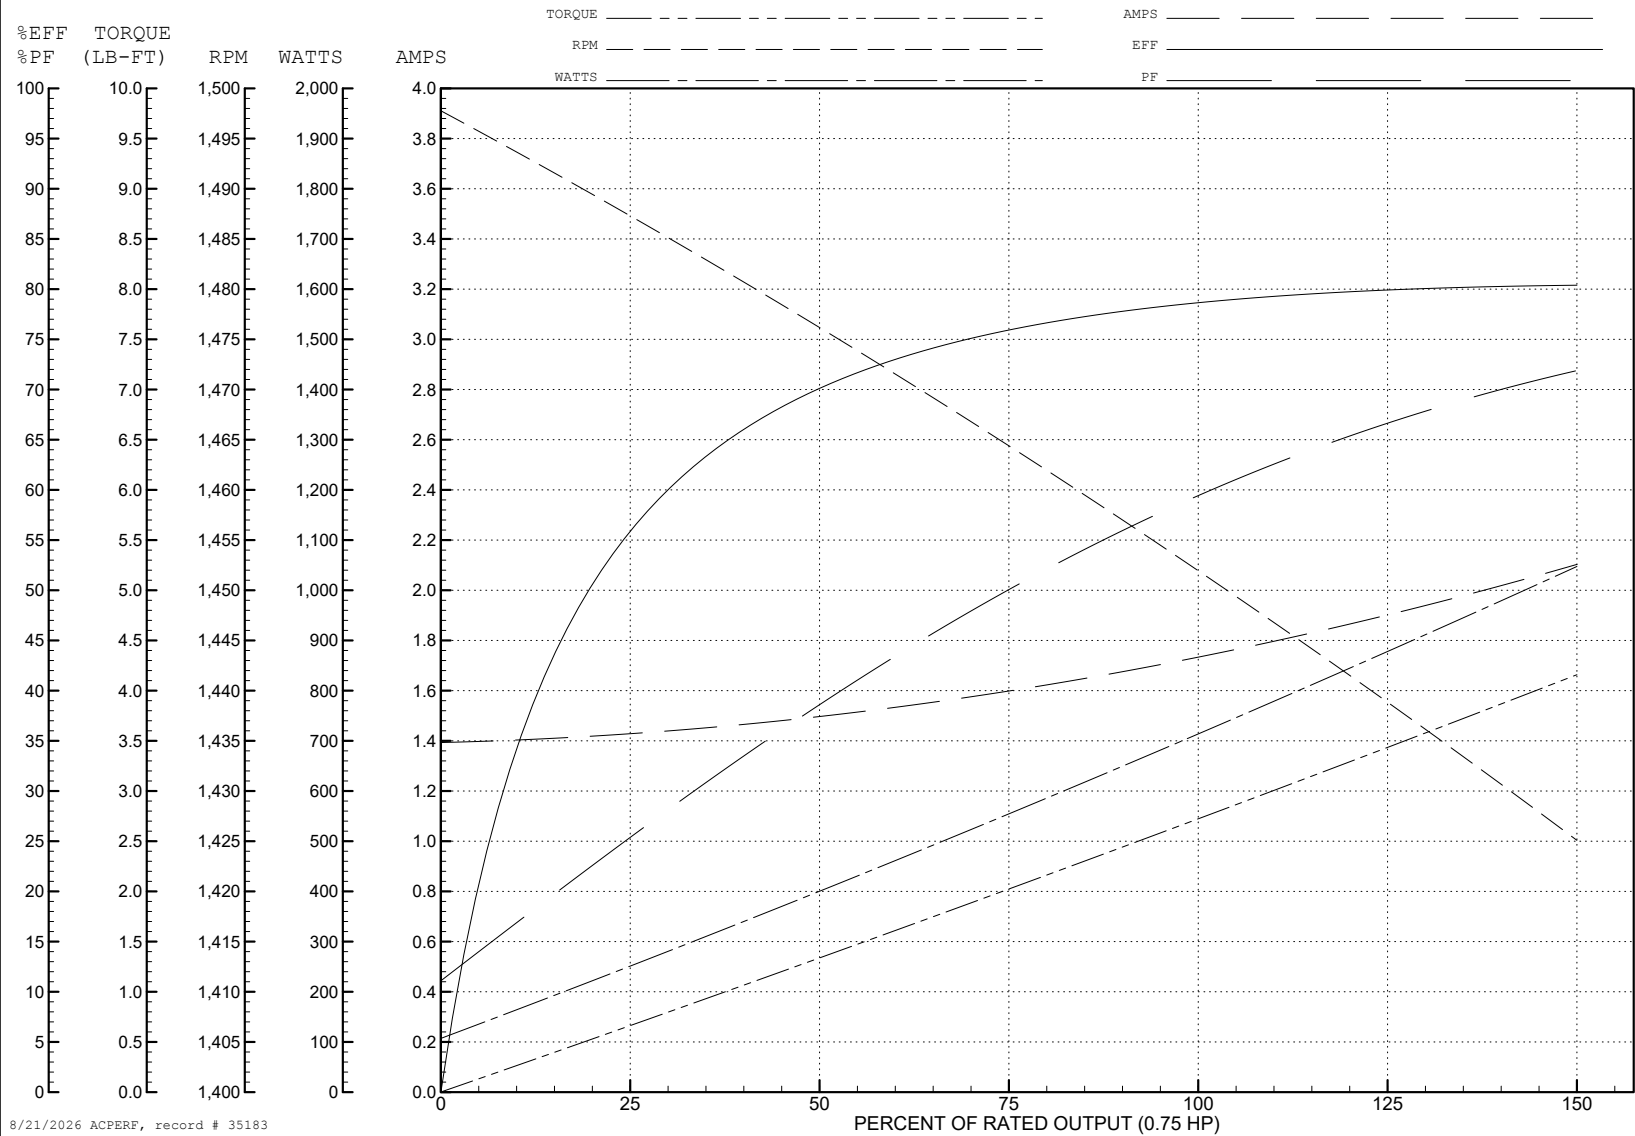

34LYA061

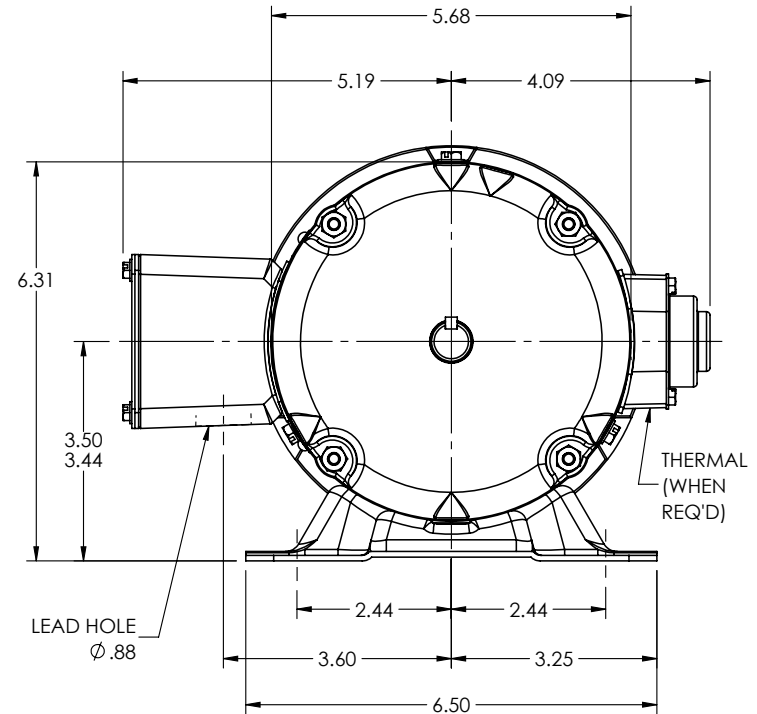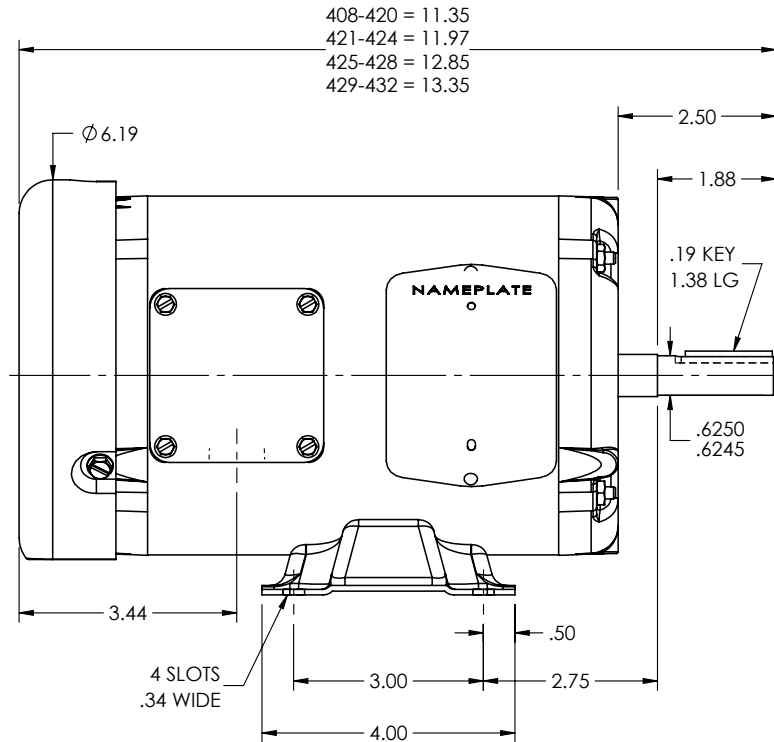

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: CLEAN UP DIMENSIONING

REV: N

VERSION: 06

REVISED: 02:32:44 11/26/2024

TDR: 000001245356

34LYA061

MODEL NO. 34LYA061

BY: ENJEFD0


REF: -

BALDOR - RELIANCE®


STD HORZ 34M NEMA 56 TEFC

34LYA061

CD0022

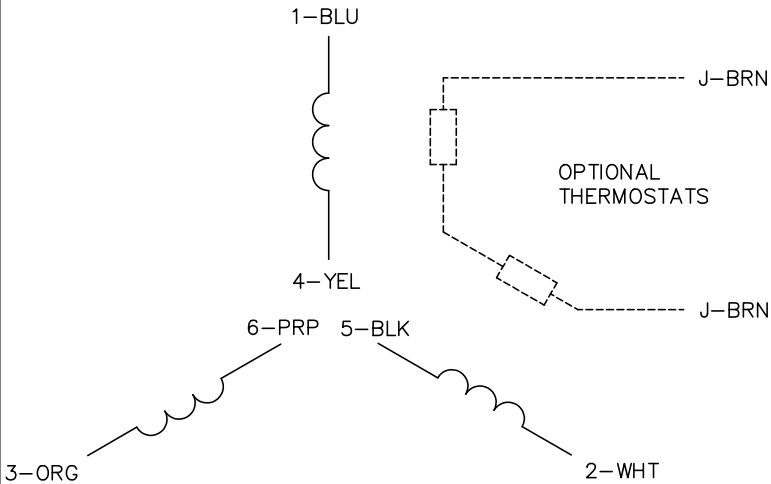


LOW VOLTAGE
(1D)



LINE

HIGH VOLTAGE
(1Y)



LINE

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: F	BY: JLP	REVISED: 01/21/99 3:54	TDR: 0171435
CD0022		FILE: AAA00005144	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 6 LEADS, DELTA/WYE CONNECTION

CD0022