

ABB BALDOR RELIANCE III

Customer information packet

SUM70504-4

5HP, 1755RPM, 3PH, 60HZ, 180TY, XPNV, V1

Class - CLI GP C,D

Division - Not Applicable

Specifications

Enclosure	TENV
Frame	180TY
Frame Material	Cast Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP C,D
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Phase	3
Agency Approvals	CULUS CCSA US
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Haz Area Temp Code	T3C
Heater Indicator	No Heater
Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	IP68
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Motor Standards	NEMA
Motor Type	M
Mounting Arrangement	V1
Number of Poles	4
Product Family	Pump - Centrifugal
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.00
Shaft Diameter	1.250 IN
Shaft Rotation	Reversible

Part Detail

Revision	C
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	86086
Layout	619738-001
Eff. date	02-18-2025
CD Diagram	
Poles	///
Leads	
Proprietary	False
Created date	10-25-2021

Shaft Slinger Indicator	No Slinger
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Winding	Normally Closed Thermostat

Nameplate

000613007MS											
CAT.NO.	SUM70504-4			SPEC NO.	S18-CWS0-0009						
SER.NO.					FRAME SIZE	180TY					
CONSTANT HP RPM	HP	RPM	VOLTS		AMPS		HZ		S.F.		
	5	1755	230/460		13.8/6.9		6-60		1.00		
	5	1755	230/460		13.8/6.9		60		1.15		
	@		HZ		CODE	J					
	TYPE	P	INSUL.CLASS		F	TORQUE	10:1_VT			DESIGN	B
D.E. BRG.	50BC02JPP30A			ENCL	TENV	DUTY		15 MIN	PH	3	
O.D.E. BRG.	25BC02JPG30A			MOTOR WEIGHT			AMB		40		
	FINAL CONN VOLTAGE = 460 *15										
	MIN IN AIR ;SUB. IN SEWAGE /										
	WATER ONLY										

000613007RC			
CLASS I GROUP	C D X	NO.	
CLASS II GROUP	X X X		
OPERATING TEMP CODE	T3C		

000692000MB	
SUITABLE FOR OPERATION ON PWM	
INVERTER EQUIPPED WITH IGBT	
DEVICES AND CAPABLE OF	
CARRIER	
FREQUENCY OF 2 KHZ MINIMUM	

000613007MS

CAT.NO.	SUM70504-4		SPEC NO.	S18-CWS0-0009		
SER.NO.			FRAME SIZE	180TY		
	HP	RPM	VOLTS	AMPS	HZ	S.F.
	5	1755	230/460	13.8/6.9	6-60	1.00
	5	1755	230/460	13.8/6.9	60	1.15
CONSTANT HP RPM		@	HZ	CODE	J	
TYPE	P	INSUL.CLASS	F	TORQUE	10:1_VT	DESIGN B
D.E. BRG.	50BC02JPP30A		ENCL	TENV	DUTY	15 MIN PH 3
O.D.E. BRG.	25BC02JPG30A		MOTOR WEIGHT		AMB	40
	FINAL CONN VOLTAGE = 460 *15					
	MIN IN AIR ;SUB. IN SEWAGE /					
	WATER ONLY					

Parts List

Part number	Description	Quantity
SA398481	SA S18-CWS0-0009	1.000 ea
RA389463	RA S18-CWS0-0009	1.000 ea
000692000EJ	NAME PLATE	1.000 ea
000692000WC	WARNING FLAMMABLE VAPORS MAY BE PRESENT	2.000 ea
000613007MS	NP, MEDIUM AC,INVERTER DUTY CSA,STD INDU	1.000 ea
000901001AA	LABEL WARNING	1.000 ea
000613007RC	C UL US NAMEPLATE FOR HAZARDOUS LOC	1.000 ea
000692000MB	BALDOR RELIANCE MOTOR DATA NAMEPLATE	1.000 ea
000613007MS	NP, MEDIUM AC,INVERTER DUTY CSA,STD INDU	1.000 ea
034692002AE	HCSPP 1/4" 304 S.S.	1.000 ea
088203001AB	BRKT,ODE,180SUB 88203-1WB	1.000 ea
004824015A	GREASE POLYREX EM	0.100 lb
032018010CG	HHCS 3/8-16X1-1/4L 316SS	4.000 ea
421900124FU	ORING	1.000 ea
004824018AF	SHELL ROTELLA OIL 10W	1.500 lb
603760001AA	LABYRINTH	1.000 ea
413480001R	RESISTOR ASSEMBLY-BLANKET	1.000 ea
413412005R	LEAD WIRE ASSY(BLANKET	1.000 ea
413412004A	SUBM MOISTURE PROBE	2.000 ea
421900124FU	ORING	1.000 ea
088205001AA	SUB PLT 180 88205-1WC	1.000 ea
032130008CC	HSHCS 3/8-16 X 1.00" L	4.000 ea
032620020JD	HSSS 10-24X5/8L 304S.S.	1.000 ea
421900124FU	ORING	1.000 ea
088204001AA	BRKT,DE,180SUB 88204-1WA	1.000 ea
032018010CG	HHCS 3/8-16X1-1/4L 316SS	4.000 ea
032018006AG	HHCS 1/4-20X3/4L 316 SS	3.000 ea
064262012B	SEAL	1.000 ea
047174005C	SNAP RING	1.000 ea
034692003AE	PPLG 3/8" 304 S.S.	2.000 ea
047174005B	SNAP RING	1.000 ea

064262012C	SEAL	1.000 ea
032080003LB	HWHMS 1/4-20X3/8L PLTED	6.000 ea
032080003JB	HWHMS 10-24X3/8L PLTED	4.000 ea
415031017A	NUT W/WASHER 10-24 C.PLT	4.000 ea
415031017B	NUT W/WASHER1/4-20 C.P	6.000 ea
032677003BG	5/16-18 X 3/8 DHFHBHCS	2.000 ea
047024003B	T/LUG AMP 33218	9.000 ea
603766501A	MACH,CAST,EX180Y,EX1,7BY	1.000 ea
421900072FU	ORING	1.000 ea
032018008BG	HHCS 5/16-18X1 316 SS	4.000 ea
032018006BM	HHCS 5/16-18X3/4 PLTGRN.	1.000 ea
032018006BM	HHCS 5/16-18X3/4 PLTGRN.	1.000 ea
034036013AB	LCKW 5/16 EXT.TOOTH LCKW	1.000 ea
034017013AC	LCKW 5/16" 316 S.S.	2.000 ea
047024003AH	T/LUG AMP 34112	4.000 ea
609181014D	HEAT SHRINK TUBING 3/4	10.000 ea
802386003R	PAIGE INTERNAL MOTOR POWER PLUG	1.000 ea
802386002R	PAIGE INTERNAL MOTOR CONTROL PLUG	1.000 ea
613425013E	12" SAFETY CABLE	2.000 ea
613425013S	FERRULE, SAFETY CABLE	2.000 ea
004824007K	SPECIAL PAINT	0.100 ea
033775004EA	DRSCR #6-1/4 304 S.S.	8.000 ea
034180009DD	KEY 1/4X1/4X1-1/8L	1.000 ea
B3630-9	SUBM THERMOSTAT TAG	1.000 ea
B-3664002	TAG, (NON REGREASABLE)	1.000 ea

Record #86086 - Typical performance - not guaranteed values

Winding	06WGA0017
Type	0640M
Enclosure	TENV

Nameplate data

Rated Output	5		
Volts	230/460		
Full Load Amps	13.8/6.9		
R.P.M.	1755		
Hz	60	Phase	3
KVA Code	J		
S.F.	1.15		
NEMA Nom. Eff.	89.5	Power Factor	76
Duty	15 MIN		
S.F. Amps			

460 V, 60 Hz:

High Voltage Connection

Full Load Torque	14.92 LB-FT
Start Configuration	direct on line
Breakdown Torque	53.26 LB-FT
Pull-up Torque	26.84 LB-FT
Locked-rotor Torque	31.7 LB-FT
Starting Current	47.59 A
No-load Current	3.62
Line-line Res. @ 25°C	2.57 Ω
Temp. Rise @ Rated Load	56°C
Temp. Rise @ S.F. Load	69°C
Locked-rotor Power Factor	41.4
Rotor inertia	0.372 lb-ft ²

Load Characteristics 460 V, 60 Hz, 5 HP


% of Rated Load	NL	25	50	75	100	125	150	SF
Power Factor	5	36	57	68	76	80	82	78
Efficiency	0	81	88.6	90.2	89.8	88.6	84.1	89.1
Speed	1799	1790	1780	1770	1758	1745	1729	1750
Line amperes	3.62	3.96	4.65	5.68	6.87	8.26	10.11	7.7


SPEED TORQUE / SPEED CURRENT CURVES

BALDOR • RELIANCE


06WGA0017

5HP 460V 60HZ

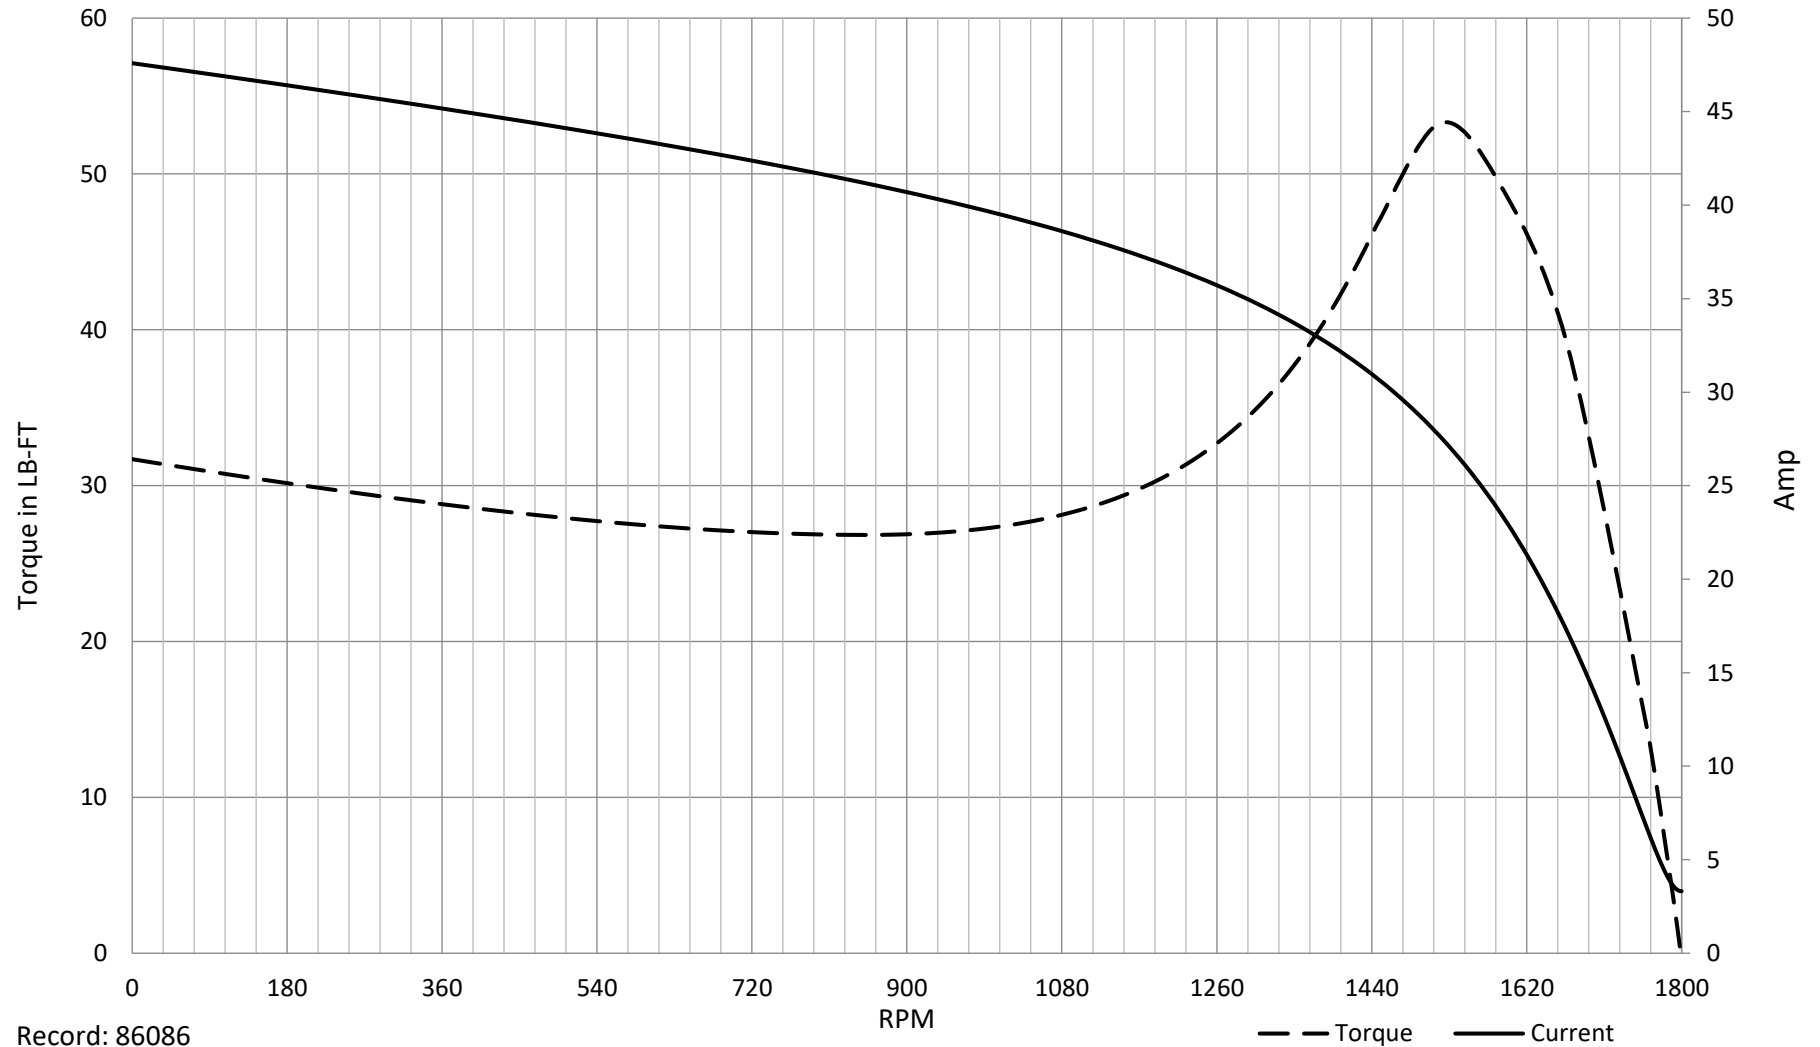


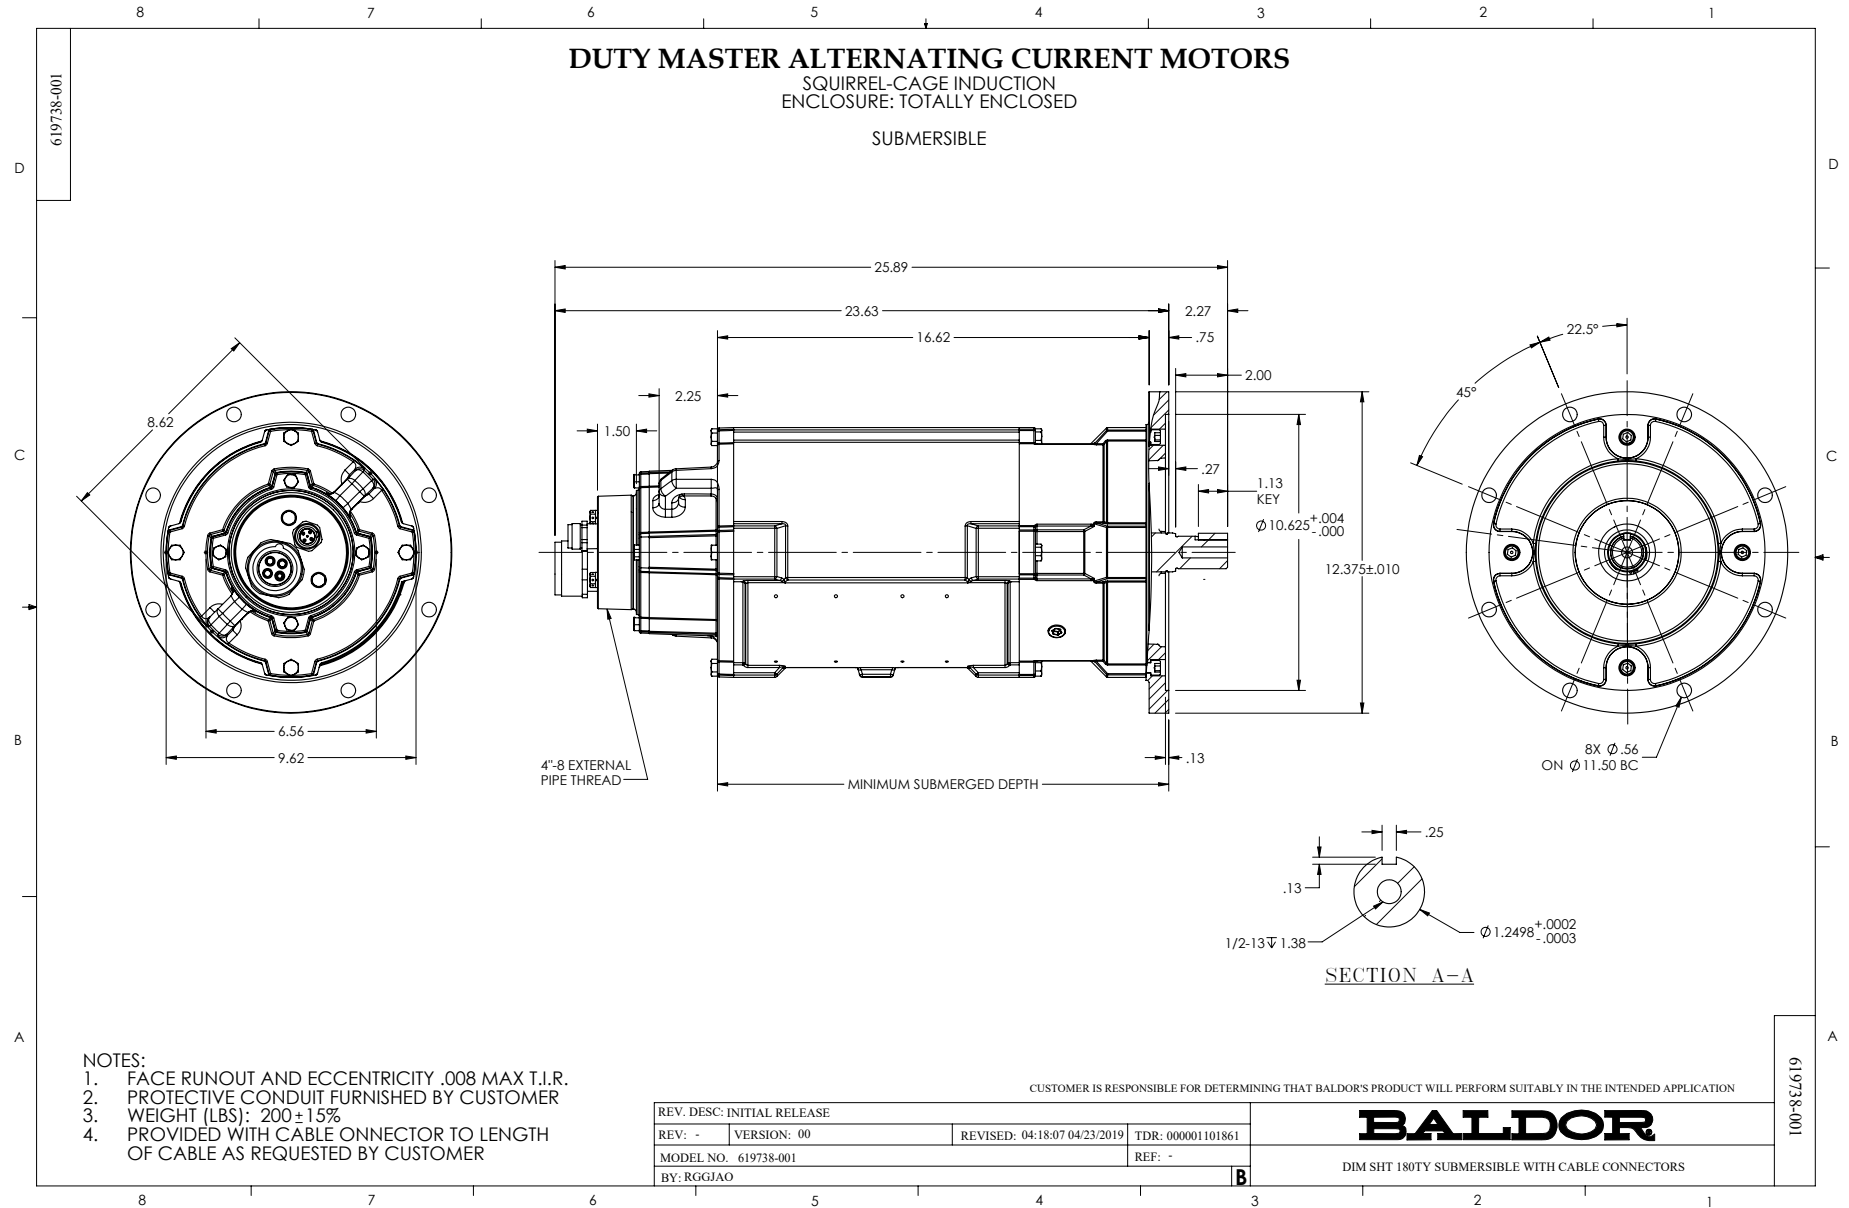

CD0005

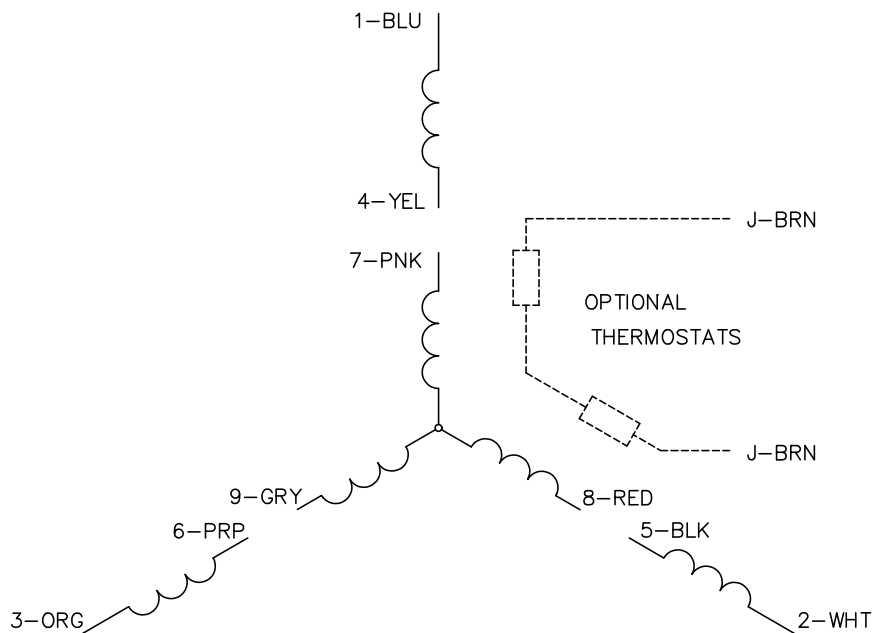


LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E

BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

900000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005