

ABB BALDOR RELIANCE III

Customer information packet

UCME3145

3-4.5HP, 3450RPM, 3PH, 60HZ, 143TYZ, 3528M, TE

Class - None

Division - Not Applicable

Specifications

Enclosure	TEAO
Frame	143TYZ
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ 4.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ 208.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	6.000 A @ 460.0 V 13.000 A @ 208.0 V 12.000 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part Detail

Revision	Q
Type	AC
Mech. spec.	35E2501
Base	
Status	PRD/A
Elec. spec.	35WGS055
Layout	35LYE2501
Eff. date	01-02-2025
CD Diagram	CD0005
Poles	02
Leads	9#18
Proprietary	False
Created date	03-04-2014

Heater Indicator	No Heater
High Voltage Full Load Amps	6.0 a
Insulation Class	H
Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Pipe Or Pipe Adaptor
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3528M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	13.37 IN
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	Standard
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.00
Shaft Diameter	0.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2

None

Nameplate

NP1279L									
CAT.NO.	UCME3145								
SPEC.	35E2501S055G1								
HP	3-4.5								
VOLTS	208-230/460								
AMP	13-12/6								
RPM	3450								
FRAME	143TYZ	HZ	60		PH	3			
SER.F.	1.00	CODE	K	DES	B	CL	H		
NEMA-NOM-EFF		PF							
RATING	40C AMB-CONT								
CC									
DE	6206	ODE	6203						
ENCL	TEAO	SN							

NP1263L											
CAT.NO.	UCME3145										
SPEC.	35E2501S055G1										
HP	3-4.5										
VOLTS	208-230/460										
AMP	13-12/6										
RPM	3450										
FRAME	143TYZ			HZ		60		PH		3	
SER.F.	1.00	CODE	K	DES		B	CL		H		
NEMA-NOM-EFF		PF									
RATING	40C AMB-CONT										
CC											
DE	6206		ODE		6203						
ENCL	TEAO	SN									

Parts List

Part number	Description	Quantity
SA277346	SA 35E2501S055G1	1.000 ea
RA263897	RA 35E2501S055G1	1.000 ea
HA6021A01SP	ADAPTOR, MACH	1.000 ea
36GS5000	GASKET CONDUIT ADAPTOR	1.000 ea
51XB1016A08	10-16X 1/2HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
35EP3122F00	MASTER ODE,203 BRG,#26 DRN	1.000 ea
HW5100A03	WAVY WASHER (W1543-017)	1.000 ea
10XN2520A24	1/4-20X 1 1/2 HEX HD X	2.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	2.000 ea
35EP3113B06	PU EP ENCL,06 BRG, SEAL, W/O GREASER	1.000 ea
HW4600H12	SEAL 1.156 X 1.874 X 0.250 SINGLE LIP DB	1.000 ea
HA1005A22	SLINGER, OD 2.00, ID 1.14, 206 BRG, GM	1.000 ea
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 ea
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 ea
HA7000A01	KEY RETAINER 7/8" DIA SHAFT	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.001 qt
LD5000B01	LEAD ASSY, ML1400DF18 W/#10 RING 36"	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.005 lb
MG1025C02	WILKOFASST SG, 787.105, TAN	0.017 ga
HA3100A20	THRUBOLT 10-32 X 9.812	4.000 ea
LC0145B01	CONNECTION LABEL	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
NP1279L	ALUM FARM DUTY UL CSA CC	1.000 ea
NP1263L	AUX, GP, ALUM, CC, LASER ETCHED	1.000 ea
36PA1000	PKG GRP, PRINT PK1016A08	1.000 ea
FE-0000001	ZRTG FE ASSEMBLY	1.000 ea

Accessories

Part number	Description	Multiplier
35-3300FD	C FACE KIT FARM DUTY 143-5TC ENCL, 6205	A8

AC Induction Motor Performance Data

Record # 8898

Typical performance - not guaranteed values

Winding: 35WGS055-R002				Type: 3528M		Enclosure: TEAO	
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		3-4.5		Full Load Torque		6.8 LB-FT	
Volts		208-230/460		Start Configuration		direct on line	
Full Load Amps		13-12/6		Breakdown Torque		31.6 LB-FT	
R.P.M.		3450		Pull-up Torque		17.1 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		28 LB-FT	
NEMA Design Code		B	KVA Code	K	Starting Current		50 A
Service Factor (S.F.)		1		No-load Current		3 A	
NEMA Nom. Eff.		0	Power Factor	0	Line-line Res. @ 25°C		3.8 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load			

Load Characteristics 460 V, 60 Hz, 4.5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	48	69	81	86	89	92
Efficiency	68.9	79.4	82.5	82.7	81.7	79.8
Speed	3562	3530	3492	3455	3412	3359
Line amperes	3.2	3.9	4.8	5.9	7.1	8.4


ABB Motors and Mechanical Inc.


WINDING # 35WGS055

Typical performance - not guaranteed values.




4.5 HP 3 PH 60 HZ 3450 RPM 460 V 3528M

TORQUES (LB-FT): PO=31.6 PU=17.1 LR=28 LRA=50

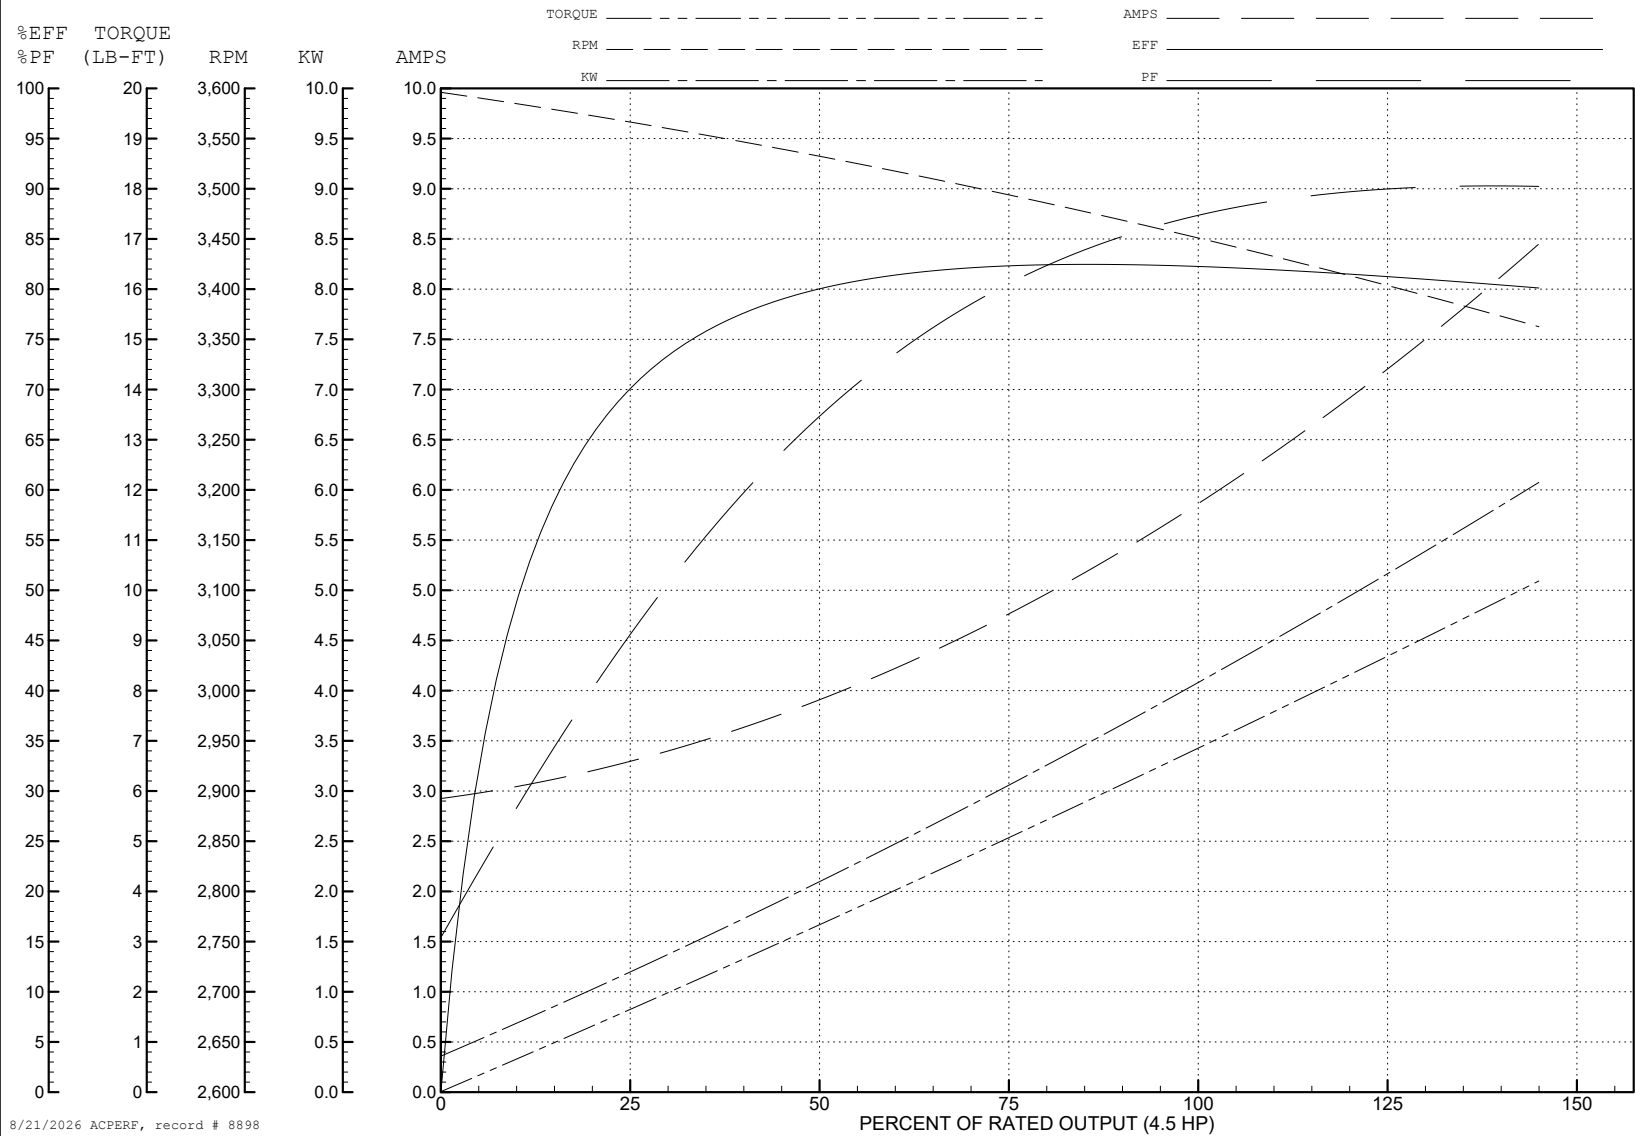

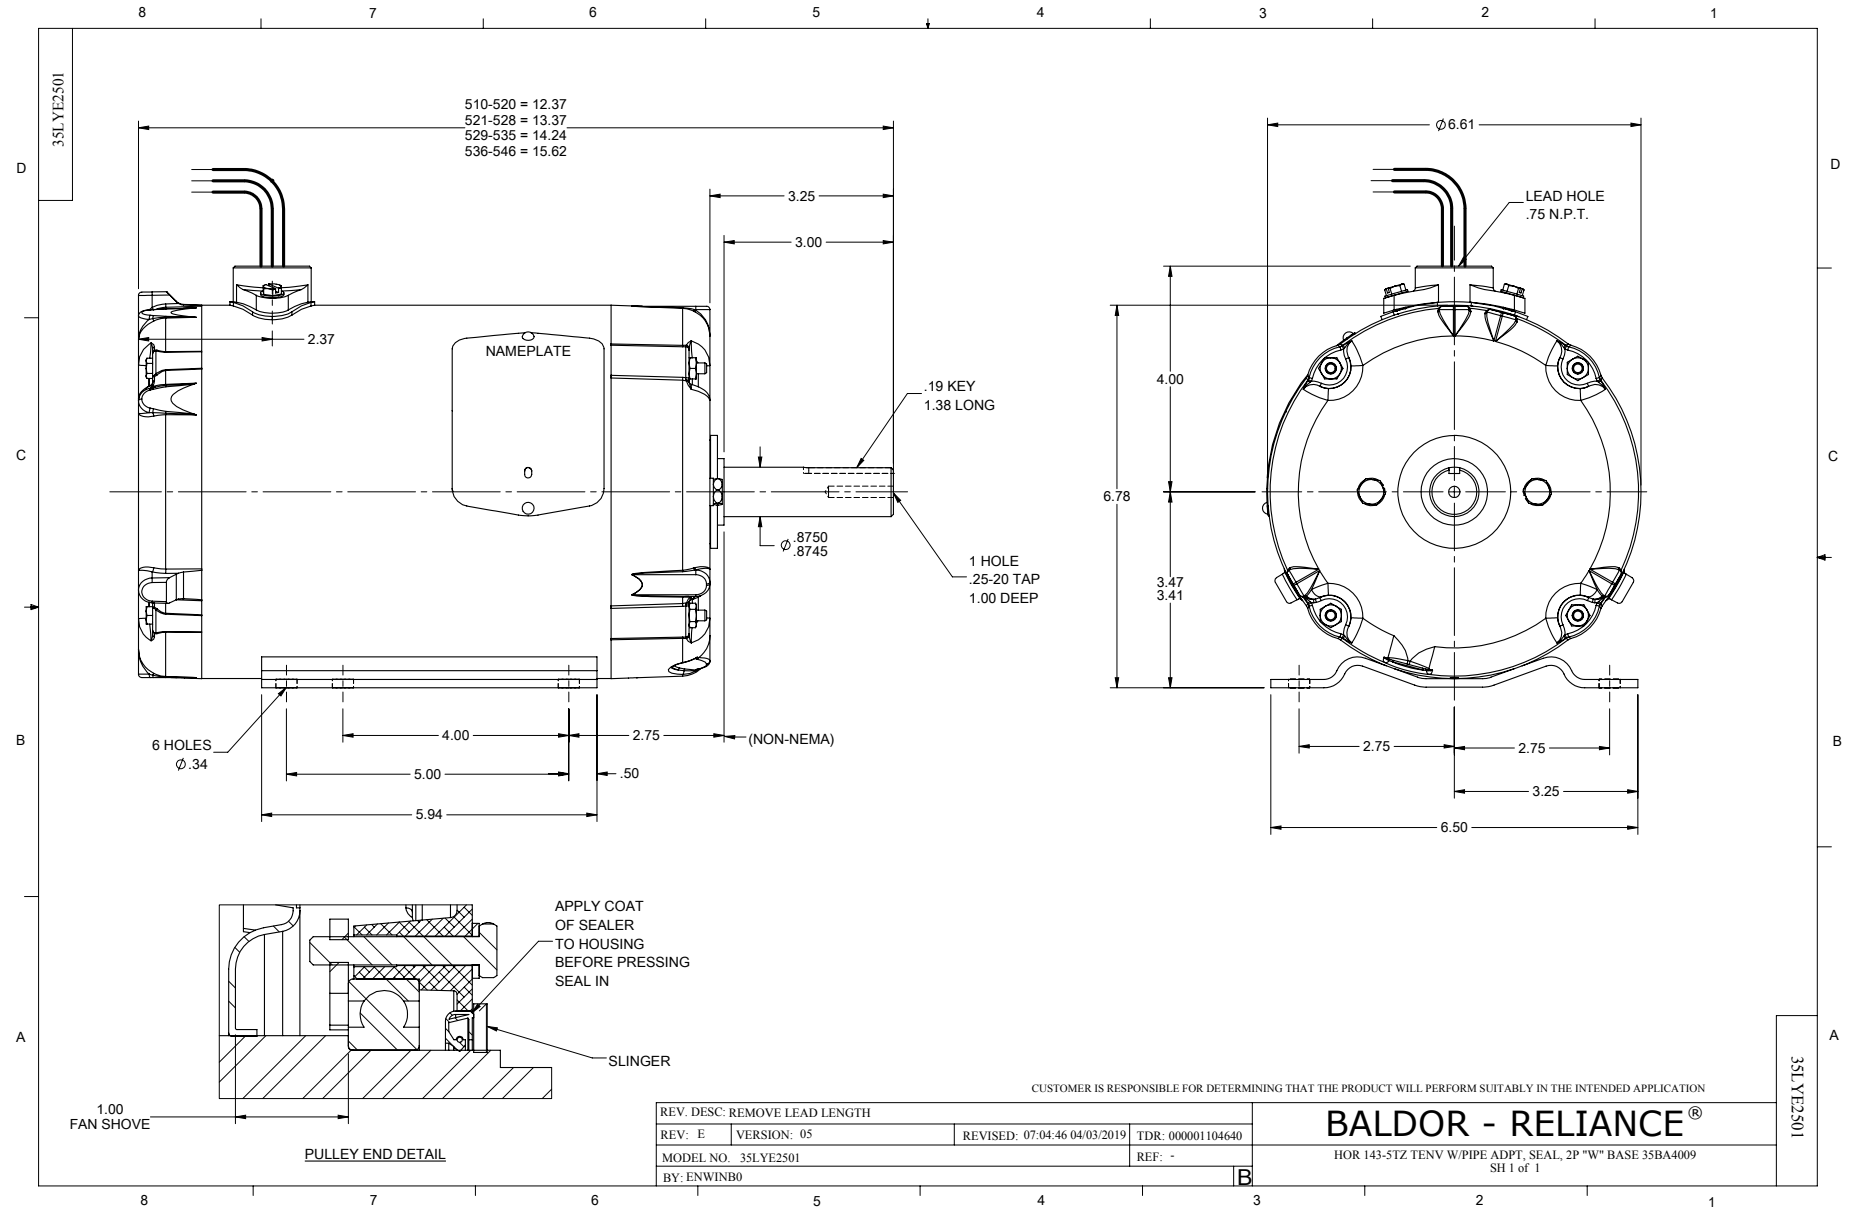

CD0005

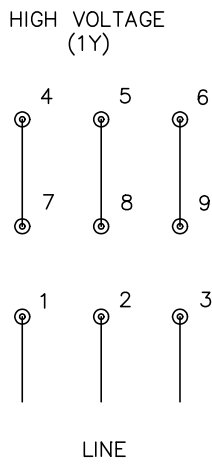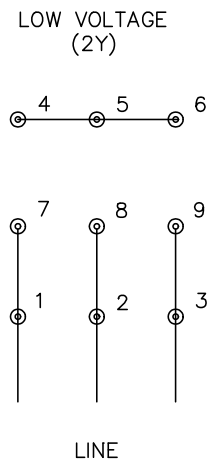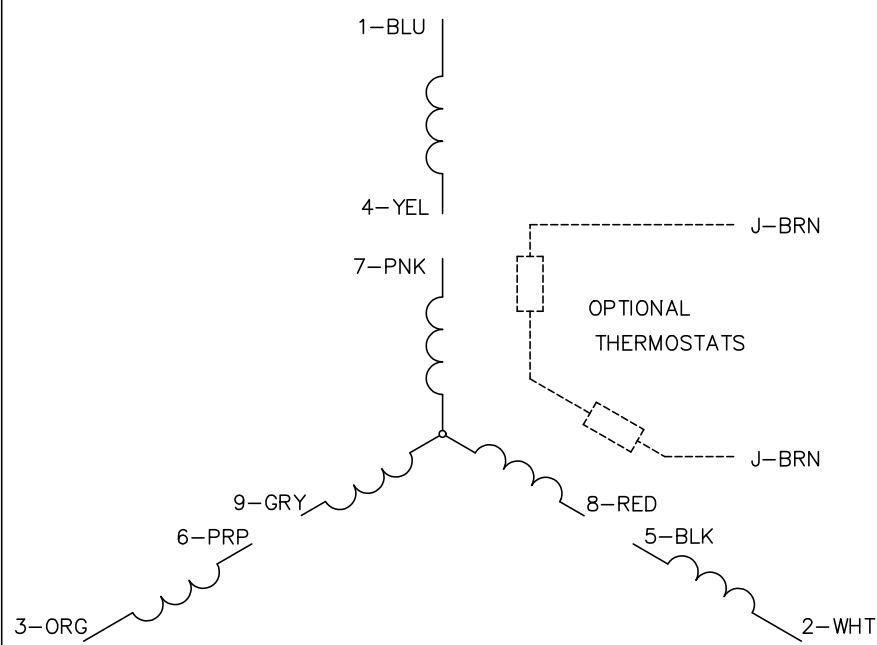

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005