

ABB BALDOR RELIANCE III

Customer information packet

VEBM3218T-DI

5HP, 1750RPM, 3PH, 60HZ, 184TC, 3640M, OPEN, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	184TC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	NEMA PREMIUM CURUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	13.200 A @ 230.0 V 14.000 A @ 208.0 V 6.600 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Brake Mounting
Front Shaft Indicator	None
Heater Indicator	No Heater

Part Detail

Revision	K
Type	AC
Mech. spec.	36Q904
Base	
Status	PRD/A
Elec. spec.	36WGS270
Layout	36LYQ904
Eff. date	01-12-2026
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	09-28-2016

High Voltage Full Load Amps	6.6 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3640M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	21.84 IN
Power Factor	80
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1750 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2

None

Nameplate

NP1259L											
CAT.NO.	VEBM3218T-DI										
SPEC.	36Q904S270G1										
HP	5										
VOLTS	230/460										
AMP	13.2/6.6										
RPM	1750										
FRAME	184TC		HZ	60				PH	3		
SER.F.	1.15	CODE	J	DES	B	CL	F				
NEMA-NOM-EFF	89.5	PF	80								
RATING	40C AMB-CONT										
CC	010A										
DE	6206		ODE	6205							
ENCL	OPEN	SN									
	SFA 15.0/7.5										

Parts List

Part number	Description	Quantity
SA328348	SA 36Q904S270G1	1.000 ea
RA316276	RA 36Q904S270G1	1.000 ea
36CB3004	36 CB CASTING W/1.09 DIA LEAD HOLE @ 6:0	1.000 ea
51XB1016A08	10-16X 1/2HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
HW3001B01	BRASS CUP WASHER, FOR #10 SCREW	1.000 ea
36EP1403A16	FR EP, 182-4C OPEN W/BRAKE W/O TIGHTSLEE	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 ea
36EP3403A03	PU E.P., TC, OPEN, 206 BRG, LESS TIGHT S	1.000 ea
36AD2000	AIR BAFFLE	1.000 ea
60XW0632A06	6-32 X 3/8 TORX HEAD SCREW TAPTITE II	4.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
10XN2520A28	1/4-20X 1 3/4 HEX HD	4.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 ea
HW2501D08	KEY, 3/16 SQ X .875 AUTO	1.000 ea
36CB4516	750LIPPED CB LID - GALVANNEAL	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
HW2501E16	KEY, 1/4 SQ X 1.750	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
84XN3816J36	3/8-16X2-1/4 SOCK HD, BK OX	4.000 ea
MG1050Y01	CELEROL BALDOR GOLD *5 GALLON BUCKET*	0.022 ga
84XN3816J36	3/8-16X2-1/4 SOCK HD, BK OX	4.000 ea
HA3101A29	THRUBOLT- 1/4-20 X 13.000	4.000 ea
96BK0615	BRAKE-25 LB/FT,230/460,180/390,60/50HZ	1.000 ea
LC0005	CONN.DIA.,TY M,9-LD,DUAL VOLT,REVERSING	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
NP1259L	ALUM SUPER-E UL CC NEMA PREMIUM A60	1.000 ea
37PA1074	PALLET PACK GRP, PRINT BOX PK1026A06	1.000 ea

PK3082	STYROFOAM CRADLE	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
PE-0000011	ZRTG PE ASSEMBLY	1.000 ea

AC Induction Motor Performance Data

Record # 53360

Typical performance - not guaranteed values

Winding: 36WGS270-R004			Type: 3640M		Enclosure: OPSB		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		5	Full Load Torque		15.05 LB-FT		
Volts		230/460	Start Configuration		direct on line		
Full Load Amps		13.2/6.6	Breakdown Torque		44.8 LB-FT		
R.P.M.		1750	Pull-up Torque		25.5 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		30.1 LB-FT	
NEMA Design Code		B	KVA Code	J	Starting Current		44.8 A
Service Factor (S.F.)		1.15		No-load Current		2.97 A	
NEMA Nom. Eff.		89.5	Power Factor	80	Line-line Res. @ 25°C		2.632 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		44°C	
S.F. Amps				Temp. Rise @ S.F. Load		56°C	
				Locked-rotor Power Factor		41	
				Rotor inertia		0.372 LB-FT2	

Load Characteristics 460 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	42	64	75	80	83	84	82
Efficiency	85.4	89.7	90.2	89.5	88.2	86.4	88.7
Speed	1789.2	1778.5	1766.9	1753.8	1739.5	1722.1	1745
Line amperes	3.33	4.14	5.26	6.59	8.05	9.68	7.47


ABB Motors and Mechanical Inc.

WINDING # 36WGS270

Typical performance - not guaranteed values.

5 HP 3 PH 60 HZ 1750 RPM 460 V 3640M

TORQUES (LB-FT): PO=44.8 PU=25.5 LR=30.1 LRA=44.8

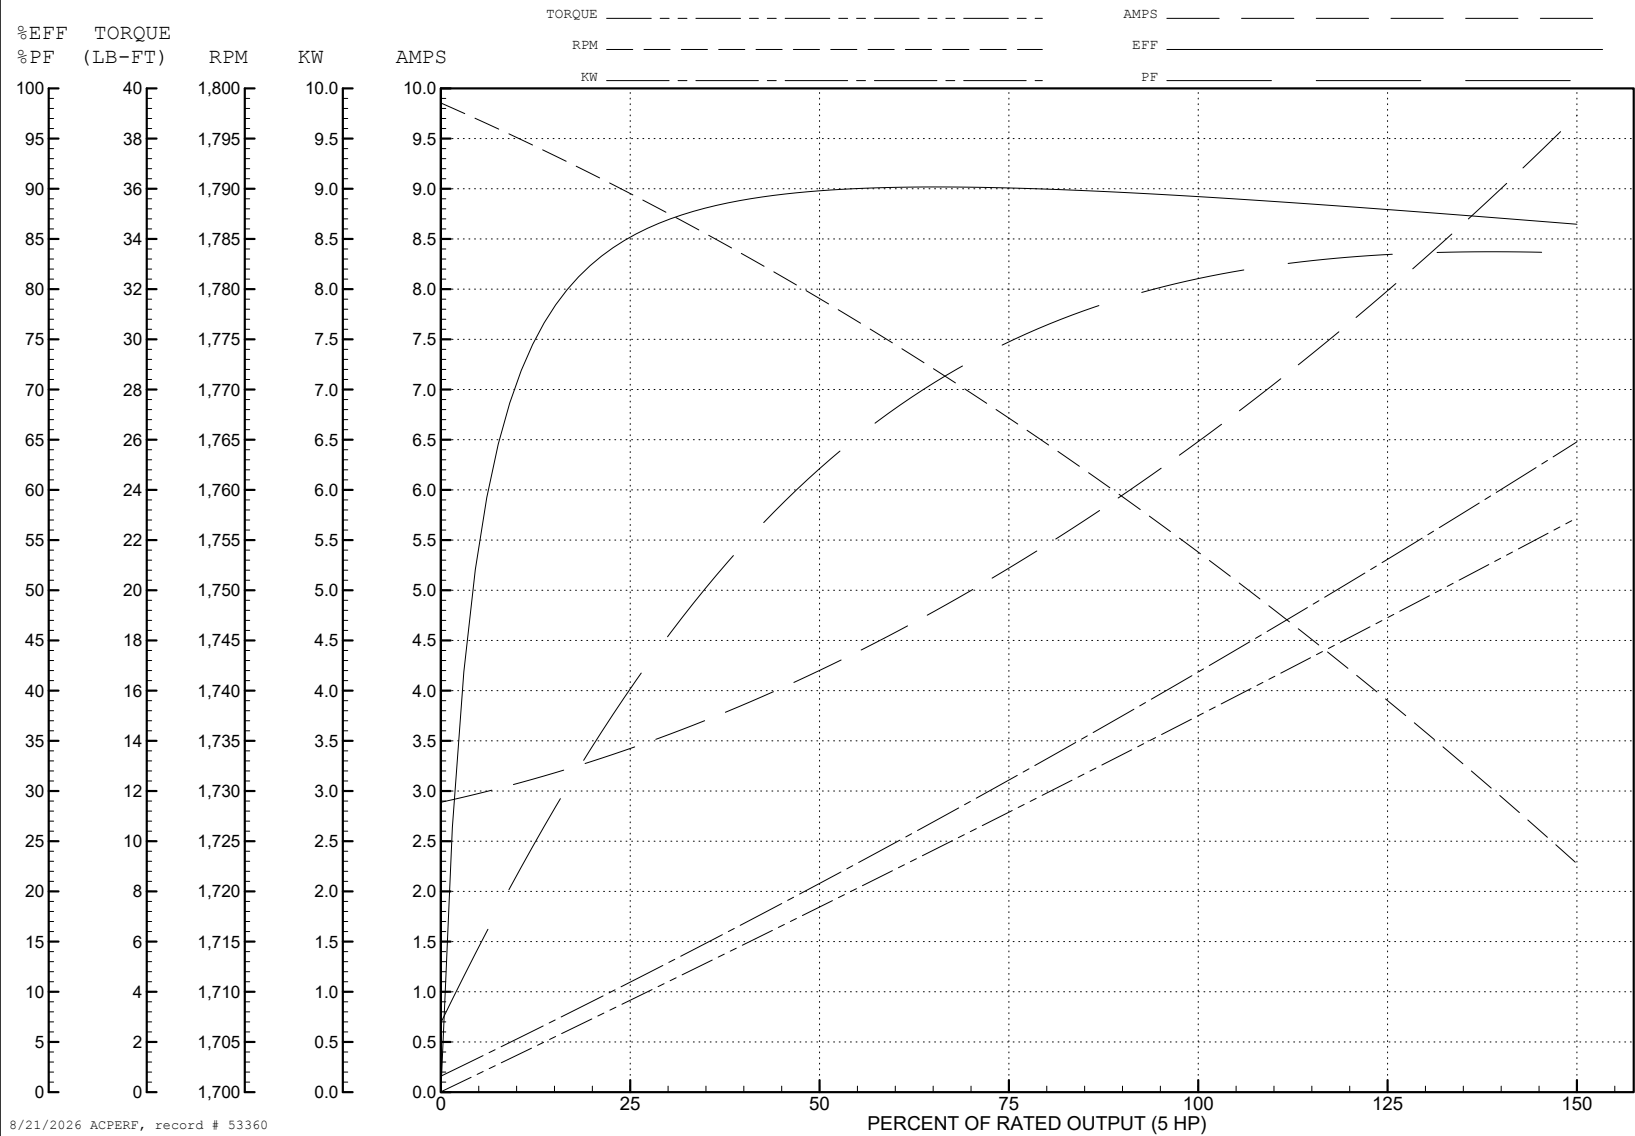

AC Induction Motor Performance Data

Record # 86108

Typical performance - not guaranteed values

Winding: 36WGS270-R004			Type: 3640M		Enclosure: OPSB	
Nameplate Data			230 V, 60 Hz: Low Voltage Connection			
Rated Output (HP)		5	Full Load Torque		15.05 LB-FT	
Volts		230/460	Start Configuration		direct on line	
Full Load Amps		13.2/6.6	Breakdown Torque		44.8 LB-FT	
R.P.M.		1750	Pull-up Torque		25.5 LB-FT	
Hz	60	Phase	Locked-rotor Torque		30.1 LB-FT	
NEMA Design Code	B	KVA Code	Starting Current		89.6 A	
Service Factor (S.F.)		1.15	No-load Current		5.94 A	
NEMA Nom. Eff.	89.5	Power Factor	Line-line Res. @ 25°C		0.656 Ω	
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		44°C	
S.F. Amps			Temp. Rise @ S.F. Load		54°C	
			Locked-rotor Power Factor		40.8	
			Rotor inertia		0.372 lb-ft²	

Load Characteristics 230 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	42	64	75	80	83	84	82
Efficiency	84.3	89.2	89.7	89.6	88.2	86.2	88.8
Speed	1789	1779	1767	1754	1740	1722	1746
Line amperes	6.66	8.28	10.52	13.18	16.1	19.36	14.9

ABB Motors and Mechanical Inc.

WINDING # 36WGS270

Typical performance - not guaranteed values.

5 HP 3 PH 60 HZ 1750 RPM 230 V 3640M

TORQUES (LB-FT) : PO=44.8 PU=25.5 LR=30.1 LRA=89.6

