

ABB BALDOR RELIANCE III

Customer information packet

VEBM3611T-5D

3HP, 1760RPM, 3PH, 60HZ, 182TC, 3628M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	182TC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	UR CE CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Brake Torque	15.0 lb-ft
Current @ Voltage	3.100 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Fan Housing Cover For Brake
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	3.1 a

Part Detail

Revision	R
Type	AC
Mech. spec.	36M111
Base	
Status	PRD/A
Elec. spec.	36WGY438
Layout	36LYM111
Eff. date	07-18-2026
CD Diagram	CD0006
Poles	04
Leads	3#16
Proprietary	False
Created date	06-01-2010

Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3628M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	21.64 IN
Power Factor	77
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1760 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2934L									
CAT.NO.	VEBM3611T-5D								
SPEC.	36M111Y438G1								
HP	3/2.24KW IP44 IC411								
VOLTS	575 46KG								
AMP	3.1								
R.P.M. (1/MIN)	1760								
FRAME	182TC		HZ	60		PH	3		
SER.F.	1.15	CODE	K	DES	B	CL	F		
NEMA-NOM-EFF	89.5	PF	77						
RATING	40C AMB-CONT								
CC	010A								
DE	6206	ODE	6205						
ENCL	TEFC	SN							
	IE3-90(75%)89.1(50%)								

Parts List

Part number	Description	Quantity
SA197449	SA 36M111Y438G1	1.000 ea
RA184840	RA 36M111Y438G1	1.000 ea
36CB3004A67	36 CB 1.09 @ 6, .88 @ 12	1.000 ea
36GS1000SP	GASKET-CONDUIT BOX, .06 THICK #SV-330 LE	1.000 ea
51XB1016A08	10-16X 1/2HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
36EP1905A03	SPL FR EP FOR SPL CI FANCOVER	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 ea
36EP3301A23	PU ENDPLATE, ENCL. 182-4TC 206 BRG. W/GR	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
10XN2520A28	1/4-20X 1 3/4 HEX HD	4.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 ea
BR2001D01	DBSC SPLINED HUB 7/8 BOR	1.000 ea
WD5133A15	7.5" - .50 FLEX TUBING ASSY W/2 - 90 DEG	0.625 ea
WD4006A01	WIRE JOINT,T&B RB-4 OR RB-44	1.000 ea
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 ea
06FH1005A03	FAN COVER, MACH FOR 36EP1905A03	1.000 ea
10XN2520A36	1/4-20X 2 1/4 HEX HD X	4.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 ea
WD4100A02	DP-1000 HEYCO PLUG OR 62MP1000 MICRO PL	1.000 ea
HA1100A06	SCREEN, RODENT	1.000 ea
60XW0632A06	6-32 X 3/8 TORX HEAD SCREW TAPTITE II	4.000 ea
36CB4516	750LIPPED CB LID - GALVANNEAL	1.000 ea
37GS1001SP	GASKET, CONDUIT BOX LID, .06 THICK LEXID	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
HW2501E16	KEY, 1/4 SQ X 1.750	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
LB1419	CONNECTION LABEL	1.000 ea
35AD2003	BAFFLE, PLATE	1.000 ea

MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
36FN3000C01SP	EXFN, PLASTIC, 5.25 OD, .912 ID	1.000 ea
MG1000N49	MUNSELL 8.5BG 3.57/2.0, GLOSS 30, B/G,	0.022 ga
HA3101A25	THRUBOLT 1/4-20 X 11.000 OHIO ROD	4.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
46BK0400C01	DBSC-V-15-MA-287/575 VAC	1.000 ea
LC0006	CONNECTION LABEL	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
NP2934L	ALUM SUPER-E UL CE UKCA WEEE CC PREM	1.000 ea
G0PA1000	PKG GRP, PRINT PK1026A06	1.000 ea
PK3082	STYROFOAM CRADLE	1.000 ea
PE-0000001	ZRTG PE ASSEMBLY	1.000 ea

AC Induction Motor Performance Data

Record # 11327

Typical performance - not guaranteed values

Winding: 36WGY438-R001			Type: 3628M		Enclosure: TEFC		
Nameplate Data			575 V, 60 Hz: Single Voltage Motor				
Rated Output (HP)		3	Full Load Torque		9 LB-FT		
Volts		575	Start Configuration		direct on line		
Full Load Amps		3.1	Breakdown Torque		31 LB-FT		
R.P.M.		1760	Pull-up Torque		16.5 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		22 LB-FT	
NEMA Design Code		B	KVA Code	K	Starting Current		25.6 A
Service Factor (S.F.)		1.15	No-load Current		1.8 A		
NEMA Nom. Eff.		89.5	Power Factor	77	Line-line Res. @ 25°C		6.11 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		41°C
S.F. Amps					Temp. Rise @ S.F. Load		50°C
					Locked-rotor Power Factor		42
					Rotor inertia		0.263 LB-FT2

Load Characteristics 575 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	37	58	71	77	81	83	79
Efficiency	84	89.1	90	89.7	88.7	87.3	89.1
Speed	1788	1778	1767	1756	1743	1729	1748
Line amperes	1.9	2.2	2.7	3.1	3.9	4.6	3.6


ABB Motors and Mechanical Inc.


WINDING # 36WGY438

Typical performance - not guaranteed values.




3 HP 3 PH 60 HZ 1760 RPM 575 V 3628M

TORQUES (LB-FT): PO=31 PU=16.5 LR=22 LRA=25.6

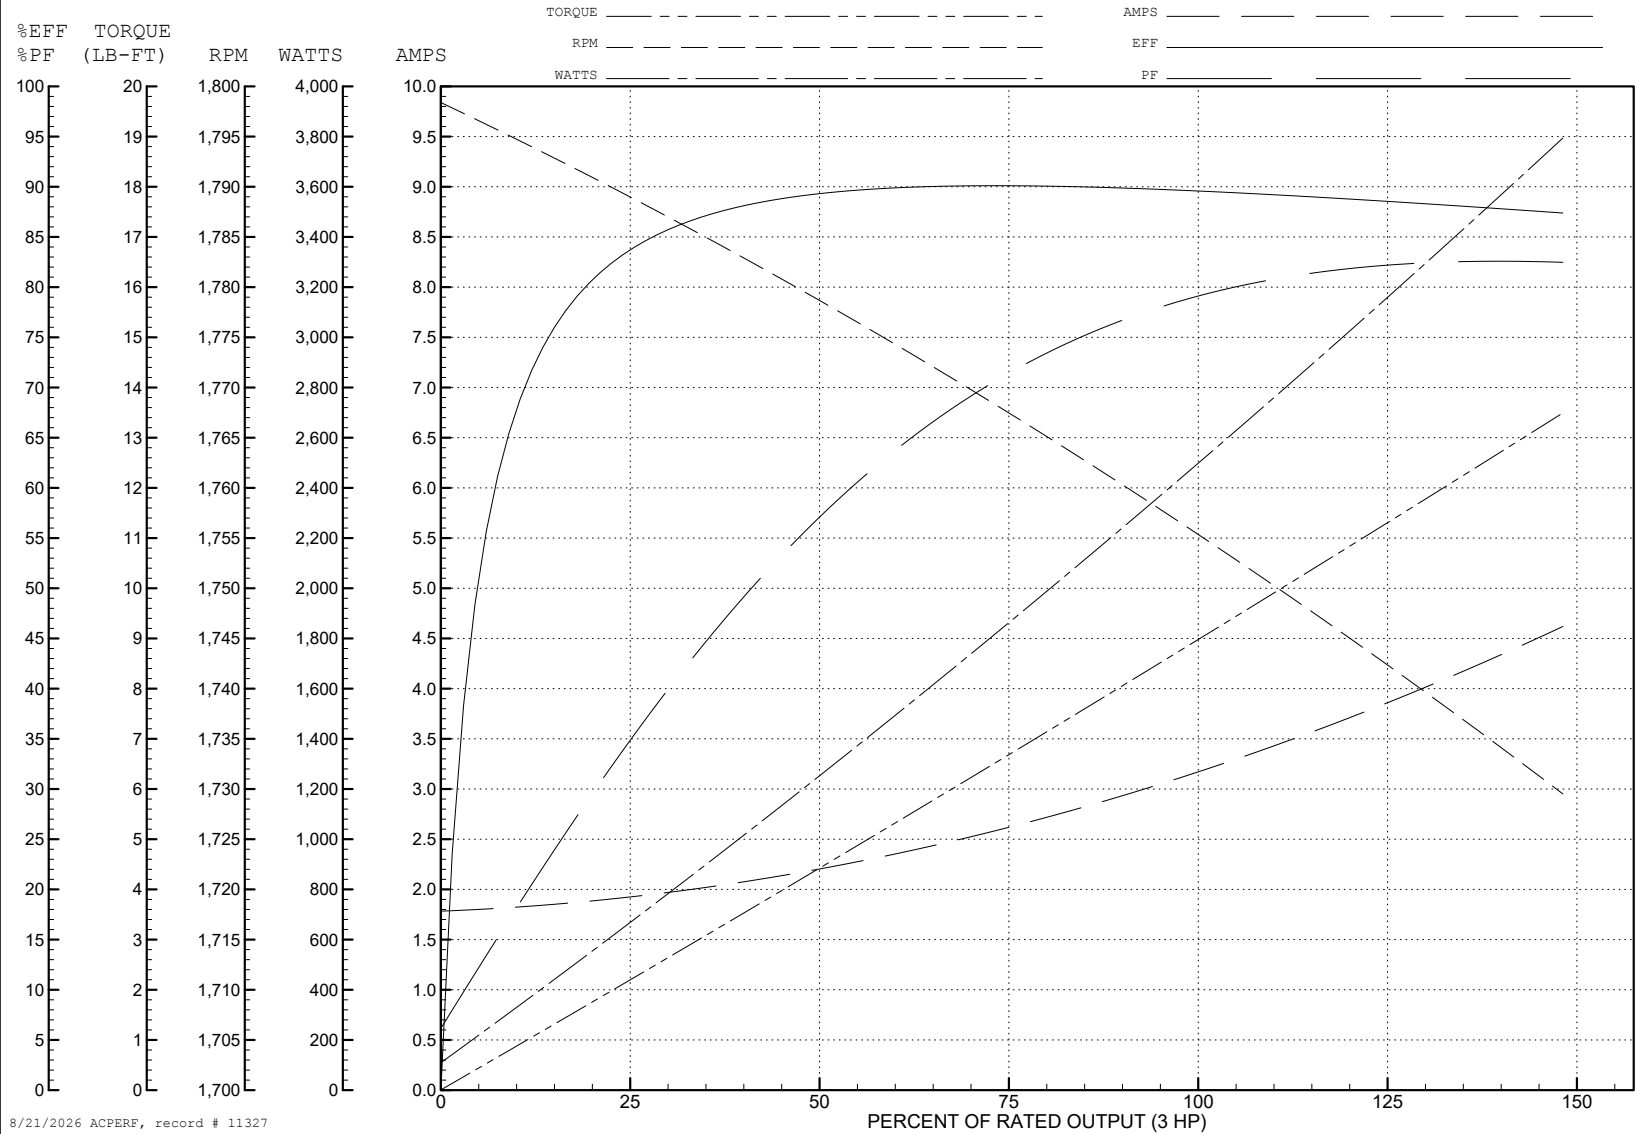



CD0006

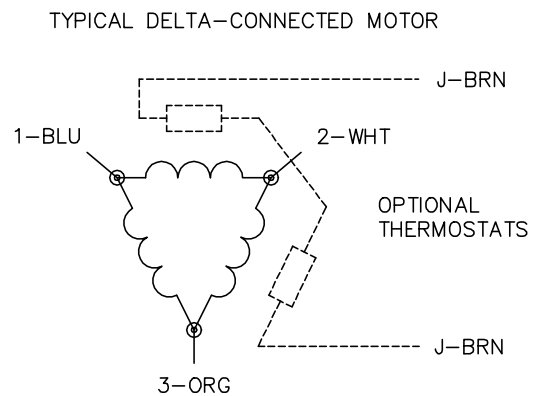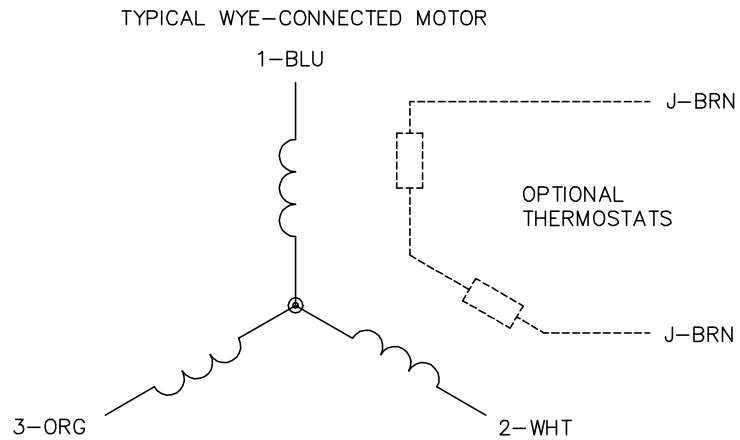

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10: 24: 49 02/19/2019

BY: ENBRIRO

MTL: —



BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1

CD2120

WIRING CONNECTIONS (1 PHASE VAC)

	POWER LINE A	POWER LINE B	CAP TOGETHER	CAP ALONE
AC LOW VOLT.	B1	B2	B3 & B5	B4
AC HIGH VOLT.	B1 & B5	B2	---	B3 CAP ALONE B4 CAP ALONE
DC VOLT.	B1	B2	B3 & B5	B4
				B1 WHITE B2 BLACK B3 GRAY B4 BLUE B5 RED

CD2120

REV. DESC: NEW		
REV. LTR: -	VERSION: 00	TDR: 000000741785
FILE: \CKA\00037\282	REVISED: 12: 28: 11 04/12/2012	
MTL: -	BY: CKRONSO	

BALDOR • DODGE • RELIANCE III
D-SERIES MOTOR BRAKE 5LD AC\DC
SH 1 of 1