

ABB BALDOR RELIANCE III

Customer information packet

VEBM3710T-D

7.5HP, 1770RPM, 3PH, 60HZ, 213TC, 3738M, TEFC

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	213TC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CE CSA NEMA PREMIUM NEMA_PREMIUM UR WEEE
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	9.500 A @ 460.0 V 20.000 A @ 208.0 V 19.000 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated

Part Detail

Revision	B
Type	AC
Mech. spec.	37M909
Base	
Status	PRD/A
Elec. spec.	37WGL864
Layout	37LYM909
Eff. date	07-18-2026
CD Diagram	CD0005
Poles	04
Leads	9#14
Proprietary	False
Created date	02-01-2021

Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	9.5 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3738M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	26.17 IN
Power Factor	80
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2

None

Nameplate

NP3469L											
CAT.NO.	VEBM3710T-D										
SPEC.	37M909L864G1										
HP	7.5/5.6KW										
VOLTS	230/460										
AMP	19/9.5										
RPM	1770 1/MIN IP44 IC411 64KG										
FRAME	213TC		HZ		60				PH	3	
SER.F.	1.15	CODE	J	DES	A	CL	F				
NEMA-NOM-EFF	91.7	PF	80								
RATING	40C AMB-S1 CONT										
CC	010A	USABLE AT 208V						N/A			
DE	6307	ODE	6206								
ENCL	TEFC	SN									
	IE3-92.0(75%)91.4(50%)										

Parts List

Part number	Description	Quantity
SA390580	SA 37M909L864G1	1.000 ea
RA381032	RA 37M909L864G1	1.000 ea
HW3200A01	3/8-16X3/4 EYEBOLT WELDED F/S	1.000 ea
37CB3006A12	37 CB 1.38 DIA @ 6:00, .88 DIA @ 12:00	1.000 ea
37GS1000SP	GASKET, CONDUIT BOX STD., .06 THICK LEXI	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
07EP1901A07	FREP, 07FH1002A09 ASS'Y ALSO REQUIRED	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 ea
37EP3300A01	PUEP ASSEMBLY FOR ROUTING	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
10XN2520A30	HEX HD CAP SCREW-STD THD-.25 X 20 THD PE	4.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 ea
XY3118A12	5/16-18 HEX NUT DIRECTIONAL SERRATION	4.000 ea
BR2004E01	BRK HUB,1.12 DIA JRNL W/.25 KEY (032416)	1.000 ea
WD5133A26	10" - .50 FLEX TUBING ASSY W/2 - 90 DEG	1.000 ea
WD4006A01	WIRE JOINT,T&B RB-4 OR RB-44	1.000 ea
HA6A33A01	ADAPTER 182-4T FOR D-SERIES BRK (024448)	1.000 ea
51XB1214A20	12-14X1.25 HXWSSLD SERTYB	1.000 ea
07FH1002A09	FN CVR, 07EP1901A07 ASLO REQUIRED	1.000 ea
WD4100A02	DP-1000 HEYCO PLUG OR 62MP1000 MICRO PL	1.000 ea
10XN3118A52	5/16-18 X 3-1/4 HEX HEAD CAP SCR,GR.5,Z/	4.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 ea
HA1103A13	#4 X 4 SCREEN FOR FAN CVR 07FH1002 (MR21	1.000 ea
13XT0832A07	8-32X7/16 TYP 23 PAN HD SLT DX	4.000 ea
37CB4516	LIPPED LID FOR 37 FRAME NEC KOBX	1.000 ea
37GS1008	37 GS FOR CB LID - LEXIDE	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
HW2501F21	KEY, 5/16 SQ X 2.375	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea

85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
LB1419	CONNECTION LABEL	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
37FN3002A01SP	EXFN, PLASTIC, 9.00 OD, 1.155 ID	1.000 ea
MG1000N49	MUNSELL 8.5BG 3.57/2.0, GLOSS 30, B/G,	0.028 ga
HA3104A17	5/16-18X13.250 T-BLT/OHIO	4.000 ea
46BK0600B01	DBSC-V-25-MA-230/460 VAC	1.000 ea
LC0005	CONN.DIA.,TY M,9-LD,DUAL VOLT,REVERSING	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
NP3469L	SS SUPER-E UL CSA NEMA PREM CE CC	1.000 ea
37PA1039	PALLET PACK GROUP, BLANK PK1148	1.000 ea
PK3082	STYROFOAM CRADLE	3.000 ea
LB1594	MYLAR WEEE WHEELIE BIN SYMBOL FOR CE MOT	1.000 ea

AC Induction Motor Performance Data

Record # 85467

Preliminary Data Sheet

Winding: 37WGL864-R001			Type: 3738M		Enclosure: TEFC		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		7.5	Full Load Torque		22.2 LB-FT		
Volts		230/460	Start Configuration		direct on line		
Full Load Amps		19.0/9.5	Breakdown Torque		69.8 LB-FT		
R.P.M.		1770	Pull-up Torque		31.5 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		41 LB-FT	
NEMA Design Code		A	KVA Code	J	Starting Current		70.7 A
Service Factor (S.F.)		1.15		No-load Current		4.32 A	
NEMA Nom. Eff.		91.7	Power Factor	80	Line-line Res. @ 25°C		1.48 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		64°C	
S.F. Amps		21.4/10.7		Temp. Rise @ S.F. Load		84°C	
				Locked-rotor Power Factor		41.9	
				Rotor inertia		0.934 lb-ft²	

Load Characteristics 460 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	42	64	75	80	83	84	83
Efficiency	87.1	91.4	92	91.7	90.7	89.6	90.7
Speed	1793	1786	1778	1770	1760	1750	1761
Line amperes	4.83	6.03	7.64	9.5	11.6	13.9	10.7


ABB Motors and Mechanical Inc.


WINDING # 37WGL864

Typical performance - not guaranteed values.



7.5 HP 3 PH 60 HZ 1770 RPM 460 V 3738M

TORQUES (LB-FT): PO=69.8 PU=31.5 LR=41 LRA=70.7

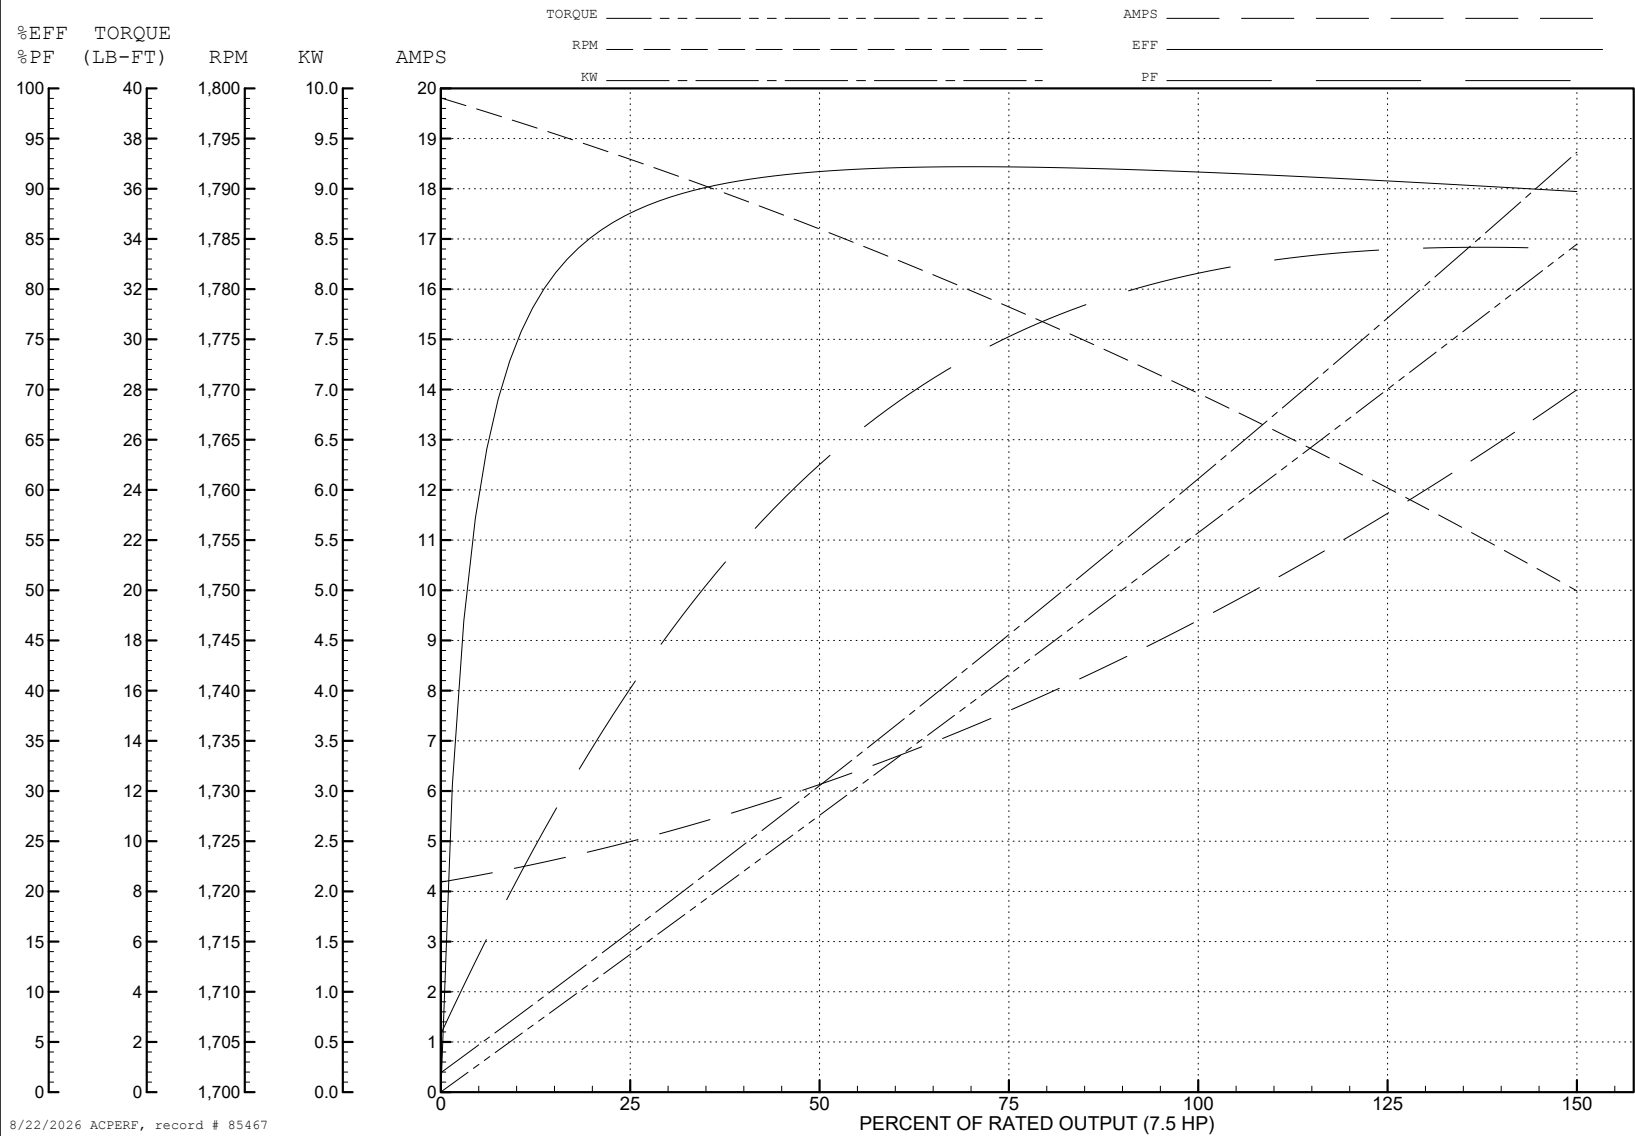

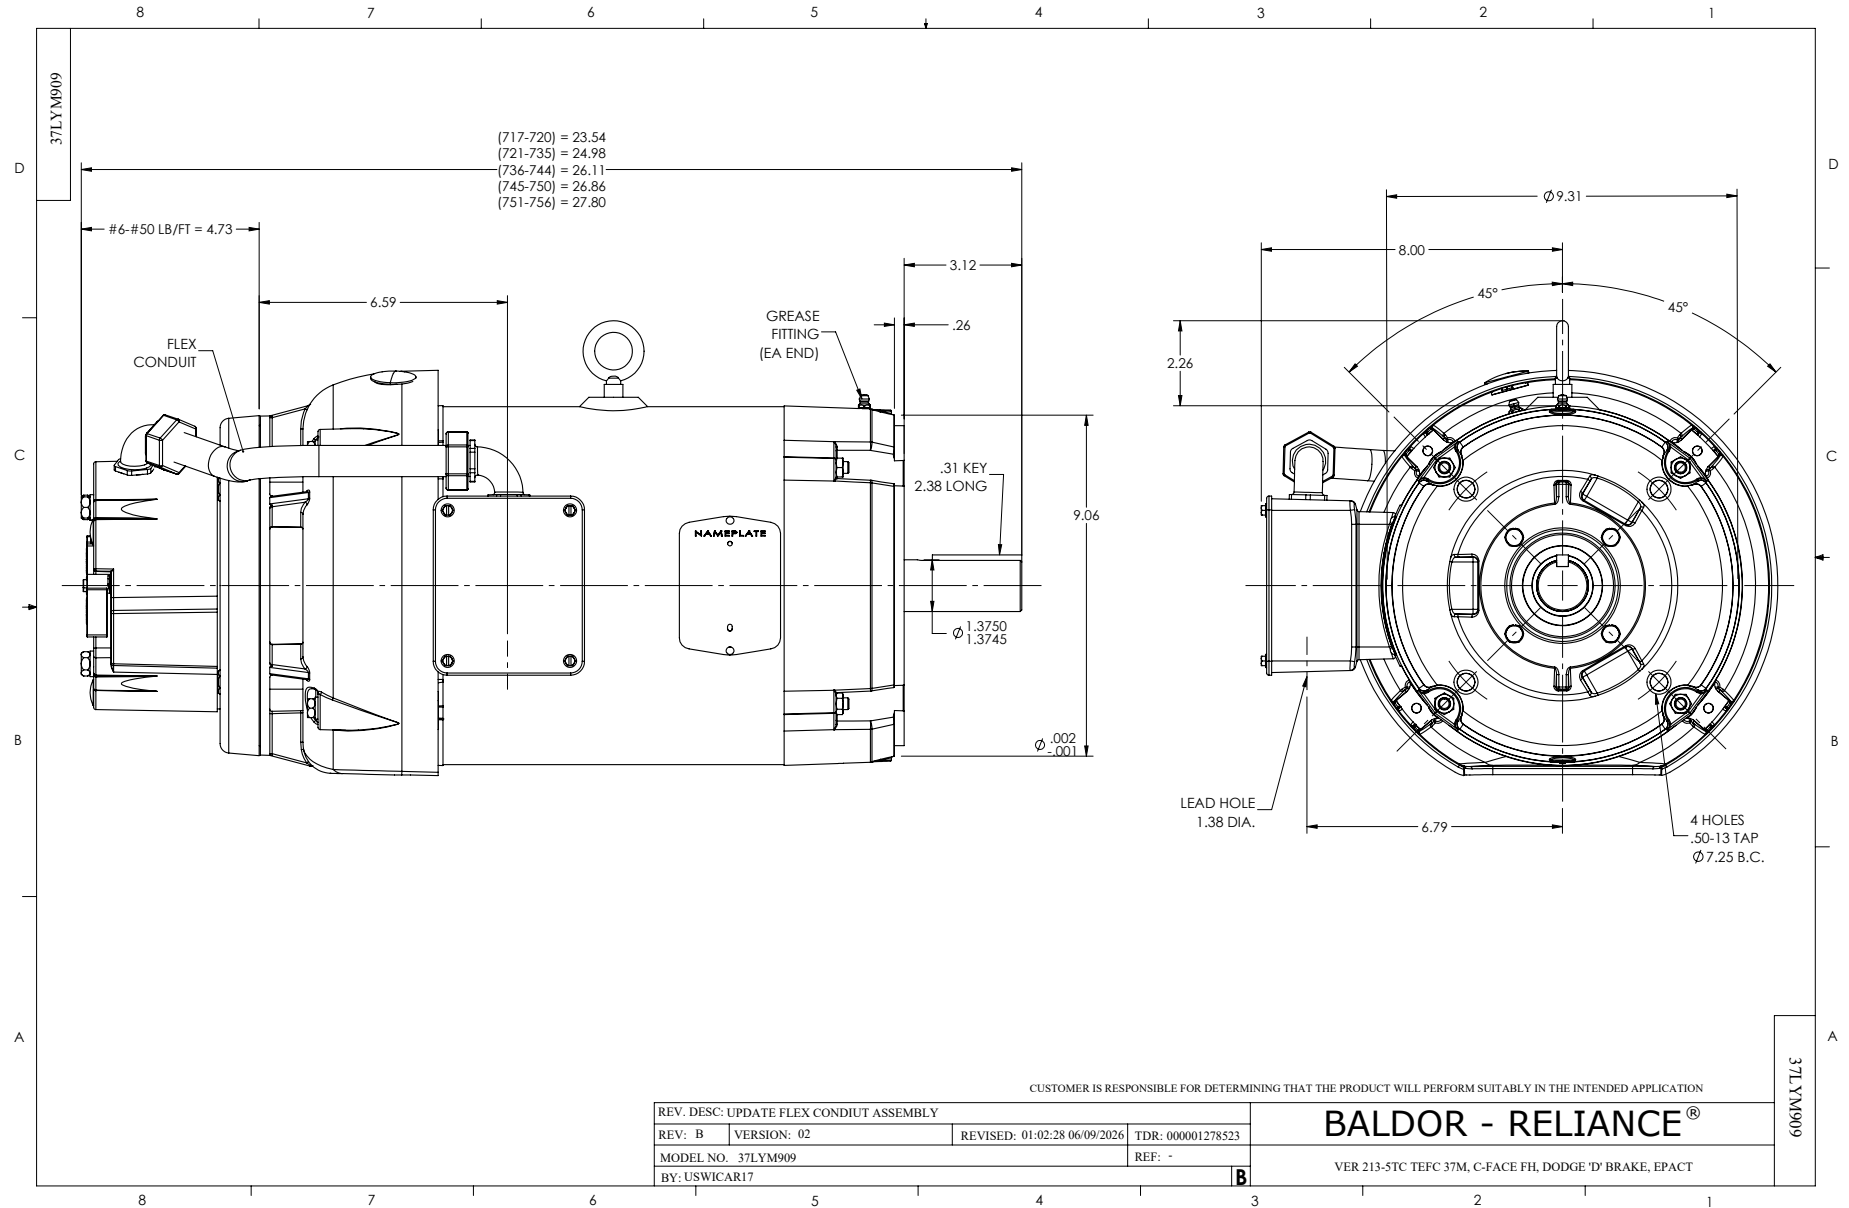

CD0005

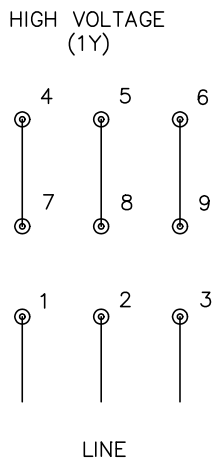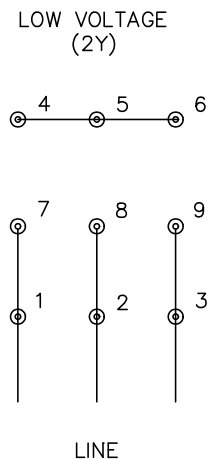

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005

CD2120

WIRING CONNECTIONS (1 PHASE VAC)

	POWER LINE A	POWER LINE B	CAP TOGETHER	CAP ALONE
AC LOW VOLT.	B1	B2	B3 & B5	B4
AC HIGH VOLT.	B1 & B5	B2	---	B3 CAP ALONE B4 CAP ALONE
DC VOLT.	B1	B2	B3 & B5	B4

B1 WHITE
 B2 BLACK
 B3 GRAY
 B4 BLUE
 B5 RED

CD2120

REV. DESC: NEW			BALDOR • DODGE • RELIANCE
REV. LTR: -	VERSION: 00	TDR: 000000741785	
FILE: \CKA\00037\282		REVISED: 12: 28: 11 04/12/2012	
MTL: -		BY: CKRONSO	

 D-SERIES MOTOR BRAKE 5LD AC\DC
 SH 1 of 1