

ABB BALDOR RELIANCE III

Customer information packet

ECS101M0H3EF4

3HP, 1800RPM, 3PH, 60HZ, 182T, TEFC, N

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	182T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Phase	3
Agency Approvals	UL
	WEEE
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	NONE
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3624B

Part Detail

Revision	X
Type	AC
Mech. spec.	36T257
Base	
Status	PRD/A
Elec. spec.	36WGL050
Layout	36LYT257
Eff. date	05-19-2026
CD Diagram	CD0005
Poles	04
Leads	9#16 Y
Proprietary	False
Created date	12-13-2018



Mounting Arrangement	F1
Number of Poles	4
Overall Length	16.54 IN
Product Family	General Purpose
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Shaft Diameter	1.125 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed Code	Single Speed
Starting Method	INVERTER SPECIAL
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Parts List

Part number	Description	Quantity
SA364403	SA 36T257L050G1	1.000 ea
RA353729	RA 36T257L050G1	1.000 ea
HW3200A01	3/8-16X3/4 EYEBOLT WELDED F/S	1.000 ea
36CB3004	36 CB CASTING W/1.09 DIA LEAD HOLE @ 6:0	1.000 ea
36GS1000SP	GASKET-CONDUIT BOX, .06 THICK #SV-330 LE	1.000 ea
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
36EP3104A02	FREP MACH W/O GRSR, RAISED FH PADS	1.000 ea
HA4067A01	PUSH IN DRAIN FITTING (BLACK)	1.000 ea
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 ea
36EP3100A42	PU EP, LOCKED 206 BRG, NO GRS	1.000 ea
BP5338A06	SHAFT GRD BRUSH, RB4014A05 RETAINER RING	1.000 ea
10XN2520A20	1/4-20X 1 1/4 HEX HD X	2.000 ea
HA4067A01	PUSH IN DRAIN FITTING (BLACK)	1.000 ea
XY2520A12	1/4-20 HEX NUT, DIRECTIONAL SERRATIONS	4.000 ea
36FH4009A101	IEC FH NO GREASER, W/PRIMER	1.000 ea
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 ea
36CB4516	750LIPPED CB LID - GALVANNEAL	1.000 ea
37GS1001SP	GASKET, CONDUIT BOX LID, .06 THICK LEXID	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
HW4600B36SP	V-RING SLINGER 1.188 X 1.380 X .24 VITON	1.000 ea
HW2501E16	KEY, 1/4 SQ X 1.750	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
36FN3000A01SP	EXFN, PLASTIC, 7.00 OD, .912 ID	1.000 ea
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 ea
HA3101A25	THRUBOLT 1/4-20 X 11.000 OHIO ROD	4.000 ea
MG1050G01	CELEROL MEDIUM CHARCOAL METALLIC GRAY	0.022 ga
LC0005	CONN.DIA.,TY M,9-LD,DUAL VOLT,REVERSING	1.000 ea
NP3968	MYLAR BLANK 4.375W X 3.375L	1.000 ea
36PA1001	PKG GRP, PRINT PK1017A07	1.000 ea
FE-0000001	ZRTG FE ASSEMBLY	1.000 ea

PE-0000001	ZRTG PE ASSEMBLY	1.000 ea
MN451	EC Titanium Quick Start 06/22	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea

36LYT257

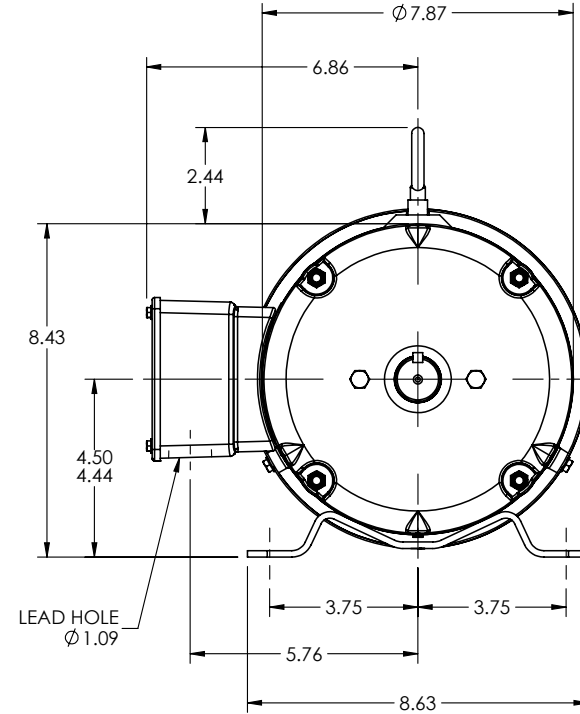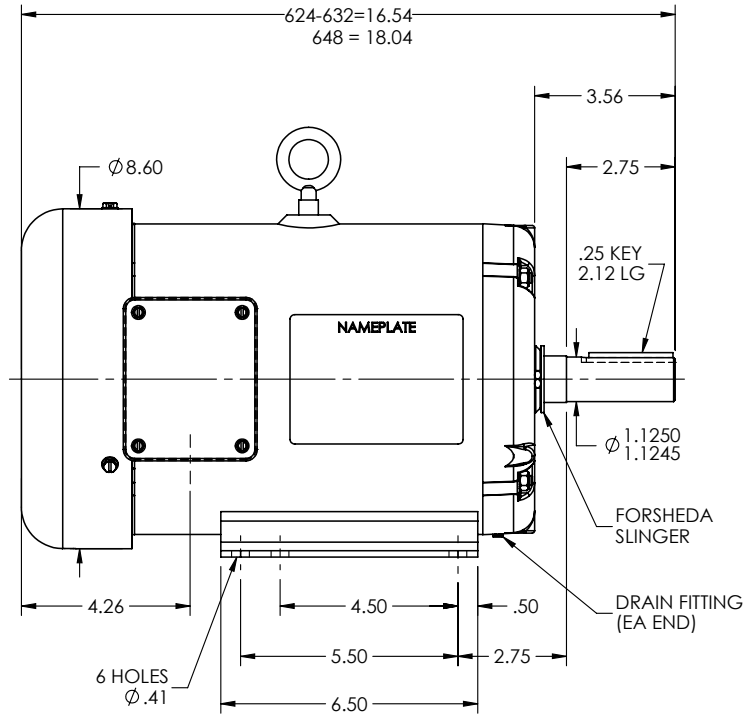

REV. DESC: CHANGE NAMEPLATE TO NP4246A01

REV: K VERSION: 10 REVISED: 07:22:51 10/06/2022 TDR: 000001196734



MODEL NO. 36LYT257

REF: -

BY: ENALEM0

Material: -

BALDOR

HOR 182-4T TEFC B EYEBOLT INT SH GND ECS

36LYT257

